



## MTLT305E USER MANUAL

Document Part Number: 7430-3316-01



ACEINNA, Inc.

email: [info@aceinna.com](mailto:info@aceinna.com), website: [www.aceinna.com](http://www.aceinna.com)

---

Date	Document Revision	Firmware Applicability	Description	Author
Jan 2024	-01	21.21	Initial Release	JF / JN / AB

## ⚠️ WARNING

Aceinna has developed this product exclusively for commercial applications. It has not been tested for, and Aceinna makes no representation or warranty as to conformance with, any military specifications or that the product is appropriate for any military application or end-use. Additionally, any use of this product for nuclear, chemical, biological weapons, or weapons research, or for any use in missiles, rockets, and/or UAV's of 300km or greater range, or any other activity prohibited by the Export Administration Regulations, is expressly prohibited without the written consent of Aceinna and without obtaining appropriate, US export license(s) when required by US law. Diversion contrary to U.S. law is prohibited.

©2020 Aceinna, Inc. All rights reserved. Information in this document is subject to change without notice.

Aceinna is a registered trademark of Aceinna Inc. Other product and trade names are trademarks or registered trademarks of their respective holders.

## Table of Contents

1	Introduction .....	5
1.1	Manual Overview .....	5
1.2	Overview of the MTLT305E Dynamic Inclination and 6 DOF IMU Sensor.....	6
2	Interface .....	8
2.1	Electrical Interface.....	8
2.1.1	Connector and Mating Connector .....	8
2.1.2	Power Input and Power Input Ground.....	9
2.1.3	CAN Serial Interface.....	9
2.1.4	RS232 Serial Data Interface .....	9
2.2	Mechanical Interface .....	10
2.2.1	Recommended Mounting Hardware and Torque .....	10
3	Theory of Operation .....	11
3.1	MTLT305E Series Default Coordinate System.....	14
3.1.1	Axis Orientation Settings .....	16
3.2	Digital Filter .....	16
3.2.1	Acceleration Filter Settings.....	16
3.2.2	Rate Sensor Filter Settings .....	16
4	Diagnostic Features .....	18
5	CAN Port Interface Definition.....	19
5.1	SAE J1939 .....	19
5.1.1	ECU's Address.....	20
5.1.2	Address Claim.....	20
5.1.3	Manual Baud Rate Configuration .....	21
5.1.4	Auto Baud Detection.....	21
5.1.5	Get Commands.....	22
5.1.6	Set Commands .....	34
5.1.7	Data Packets .....	45
5.1.8	Diagnostic Messages DM1.....	52
5.2	DBC File.....	55
6	RS-232 Port Interface Definition.....	56
6.1	General Settings.....	56
6.2	Number Formats.....	56

---

6.3	Packet Format.....	57
6.3.1	Packet Header.....	57
6.3.2	Packet Type.....	57
6.3.3	Payload Length.....	58
6.3.4	Payload.....	58
6.3.5	16-bit CRC-CCITT .....	58
6.3.6	Messaging Overview.....	58
7	MTLT305E Standard RS232 Port Commands and Messages .....	60
7.1	Link Test.....	60
7.1.1	Ping Command.....	60
7.1.2	Ping Response .....	60
7.1.3	Echo Command.....	60
7.1.4	Echo Response .....	60
7.2	Interactive Commands.....	61
7.2.1	Get Packet Request .....	61
7.2.2	System Reset Command.....	61
7.2.3	System Reset Response .....	61
7.2.4	Error Response .....	61
7.3	Output Packets (Polled).....	62
7.3.1	Identification Data Packet.....	62
7.3.2	Version Data Packet.....	62
7.3.3	Test (Detailed BIT and Status) Packet .....	63
7.4	RS232 Output Packets (Polled or Continuous) .....	63
7.4.1	Angle Data Packet 2 (Default MTLT305E Data) .....	63
7.4.2	Scaled Sensor Data.....	64
8	MTLT305E Advanced RS232 Port Commands .....	66
8.1	Configuration Fields.....	66
8.2	Continuous Packet Type Field.....	67
8.3	Digital Filter Settings .....	67
8.4	Orientation Field.....	67
8.5	Unit Behavior Switches.....	68
8.6	Commands to Program Configuration Using RS232 Port.....	68
8.6.1	Write Fields Command .....	68

---

8.6.2	Set Fields Command .....	70
8.7	Read Fields Command .....	71
8.8	Read Fields Response.....	71
8.9	Get Fields Command.....	72
8.10	Get Fields Response.....	72
9	Bootloader .....	74
9.1	Firmware Upgrade.....	74
9.2	Firmware Upgrade Using RS232 Interface .....	74
9.2.1	Commands used for FW upgrade via RS232 Interface .....	74
10	Customer Service.....	76
10.1	Contact Directory.....	76
10.2	Return Procedure .....	76
10.2.1	Authorization.....	76
10.2.2	Identification and Protection .....	77
10.2.3	Sealing the Container .....	77
10.2.4	Marking.....	77
	Appendix A: 16-bit CRC Implementation Sample Code.....	78
	Appendix B: Installation and Operation of NAV-VIEW over RS232.....	79
	Appendix C: Response to ECU ID request example .....	88
	Appendix D: Response to SW Version request .....	90
	Appendix E: FOM and BIT Examples.....	92
	Appendix F: Advanced RS232 Port BIT .....	93
	Appendix G: RS232 Sample Packet Decoding.....	94

---

## About this Manual

The following annotations have been used to provide additional information.

### ◀ NOTE

Note provides additional information about the topic.

### ☒ EXAMPLE

Examples are given throughout the manual to help the reader understand the terminology.

### ☛ IMPORTANT

This symbol defines items that have significant meaning to the user

### ⚠ WARNING

The user should pay particular attention to this symbol. It means there is a chance that physical harm could happen to either the person or the equipment.

The following paragraph heading formatting is used in this manual:

## 1 Heading 1

### 1.1 Heading 2

#### 1.1.1 Heading 3

##### 1.1.1.1 Heading 4

Normal

## 1 Introduction

### 1.1 Manual Overview

This manual provides a comprehensive introduction to ACEINNA's MTLT305E Dynamic Inclination, Rate, and Acceleration sensor. Table 1 highlights the content in each section and suggests how to use this manual.

**Table 1. Manual Content**

Manual Section	Who Should Read?
Section 1: Overview	All customers should read sections 1 and 1.2.
Section 2: Interface	Customers designing the electrical and mechanical interface to the MTLT305E series products should read Section 2.
Section 3: Theory of Operation	All customers should read Section 3.
Section 4 - 5: Safety Features and CAN Port Interface	Customers designing the software interface to the MTLT305E series products CAN Port should review Section 4 and 5
Section 6 - 8: RS232 Port Interface	Customers designing the software interface to the MTLT305E series products RS232 Port should review Sections 6 - 8
Section 9: Bootloader	Customers upgrading firmware should review Section 9.
Section 10: Warranty and Support	Customers who need the support information should review Section 10.

## 1.2 Overview of the MTLT305E Dynamic Inclination and 6 DOF IMU Sensor

This manual introduces the use of ACEINNA's MTLT305E Dynamic Inclination, Rate, and Acceleration Sensor shown in Table 2. This manual is intended to be used as a detailed technical reference and operating guide. ACEINNA's MTLT305E combines the latest in high-performance commercial MEMS (Micro-electromechanical Systems) sensors and digital signal processing techniques to provide a small, rugged and cost-effective solution for accurately sensing 3D acceleration, 3D rotational rate, and pitch and roll in dynamic applications.

**Table 2. MTLT305E Series Feature Description**

Product	Features
MTLT305E	Pitch, Roll, 3D $\pm 8$ g acceleration, 3D $\pm 400$ deg/s rotational rate

The MTLT305E integrates knowledge and experience from over a decade of field experience, thousands of deployed units and millions of operational hours in a wide range of land, marine, airborne, and instrumentation applications.

At the core of the MTLT305E Series is a rugged 6-DOF (Degrees of Freedom) MEMS inertial sensor cluster. The 6-DOF MEMS inertial sensor cluster includes three axes of MEMS angular rate sensing and three axes of MEMS linear acceleration sensing. These sensors are based on rugged, field proven silicon micromachining technology. Each sensor within the cluster is individually factory calibrated for temperature and non-linearity effects during ACEINNA's manufacturing and test process using automated thermal chambers and precision rate tables.

Coupled to the 6-DOF MEMS inertial sensor cluster is a high-performance microprocessor that utilizes the inertial sensor measurements to accurately compute attitude (pitch and roll). The attitude algorithm is a multi-state Extended Kalman Filter (EKF) continuously correcting for drift errors and estimating sensor bias values.

A unique feature of the MTLT305E Series is the extensive field configurability of the device. This field configurability allows the MTLT305E to satisfy a wide range of applications and performance requirements with a single mass-produced hardware platform. Parameters that can be configured include baud rate, low pass filter settings (acceleration and rate sensors) packet type, update rate, and defining of custom orientation.

The MTLT305E firmware is designed to be field upgradable so units in the field can be upgraded to take advantage of new features or algorithm improvements that may be available in future firmware revision releases. Additionally it is largely interface compatible with the high performance MTLT335D, allowing customers to offer different performance tiers to their customers using the same system software.

The MTLT305E Series is available in a lightweight, rugged, IP69K over molded sealed plastic enclosure with nickel plated brass mounting bushings designed for cost-sensitive commercial applications requiring a robust solution that can be exposed to the elements. The MTLT305E can be configured to output data over a CAN Port and / or a RS232 serial port. The MTLT305E RS232 output data port is supported by ACEINNA's NAV-VIEW 3.X, a powerful PC-based operating

---


tool that provides complete field configuration, diagnostics, charting of sensor performance, and data logging with playback.

## 2 Interface

### 2.1 Electrical Interface

#### 2.1.1 Connector and Mating Connector

The MTLT305E connector is an AMPSEAL16 6-pos defined in Figure 1

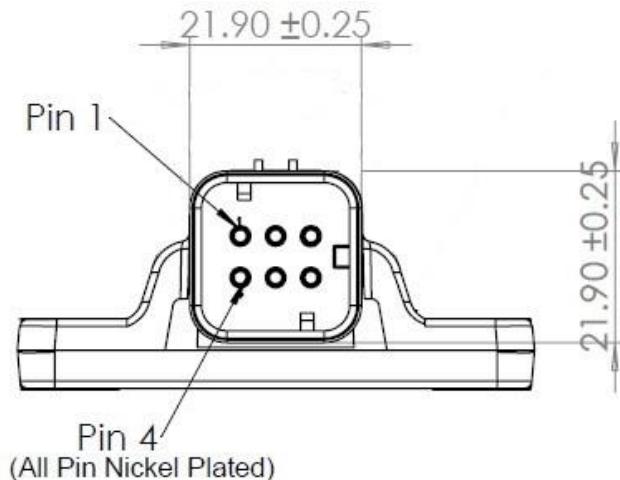

**Figure 1 MTLT305E Interface Connector**

The mating connector is: TE Connectivity 776531-1 or equivalent, which is currently listed at the following web address: <http://www.te.com/usa-en/product-776531-1.html>



The definitions of connector pins are in Table 3.

**Table 3. MTLT305E Interface Connector Pin Definition**

Pin	Signal
1	CAN H
2	CAN L
3	Ground
4	RS232 RX / PPS in / Function Instance
5	RS232 TX / Function Instance
6	Power

### ***2.1.2 Power Input and Power Input Ground***

Power is applied to the MTLT305E on pin 6, and ground is Pin 3; The MTLT305E accepts an unregulated 9 to 32 VDC input. It is reverse polarity and ESD protected internally. It is designed to be compatible with 12 V and 24 V power environments of Heavy Equipment and Passenger Vehicle power systems.

### ***2.1.3 CAN Serial Interface***

The MTLT305E is equipped with a CAN 2.0 electrical interface and is compliant to the SAE J1939 protocol standard.

**Baud Rate:** The MTLT305E has Auto Baud detection enabled as its default configuration. It will synchronize automatically to CAN traffic on the CAN bus running at (250, 500, 1000) kbaud. Auto baud can be disabled and a preferred baud rate set and permanently saved by the user using the RS232 port and NAV-VIEW 3.x SW running on a PC. See the section 5.1.4 and 5.1.6.7.

**CAN Address:** The default CAN address is 0x80. The MTLT305E has address claiming capability. In the event there is a conflict with another module on the bus with the same address, it will attempt to claim a new address and save it in non-volatile memory. The CAN address can be changed and permanently saved by the user using the CAN bus, see section 5.1.6.7, or using the RS232 port and NAV-VIEW 3.x SW running on a PC.

### ***2.1.4 RS232 Serial Data Interface***


The default baud rate of RS232 interface is 115200bps. MTLT305E also supports 38400, 57600, 230400 bps baud rates. User can choose desired baud rate and permanently save it in non-volatile memory through NAV-VIEW.

The RS232 standard defines the voltage levels that correspond to logical one and logical zero levels for the data transmission and the control signal lines. Valid signals are either in the range of +3 to +15 volts or the range -3 to -15 volts with respect to the "Common Ground" (GND) pin.

A "3-wire" RS-232 connection consisting only of transmit data, receive data, and ground, is used.

## 2.2 Mechanical Interface

The MTLT305E mechanical interfaces are defined by the outline drawings in Figure 2.

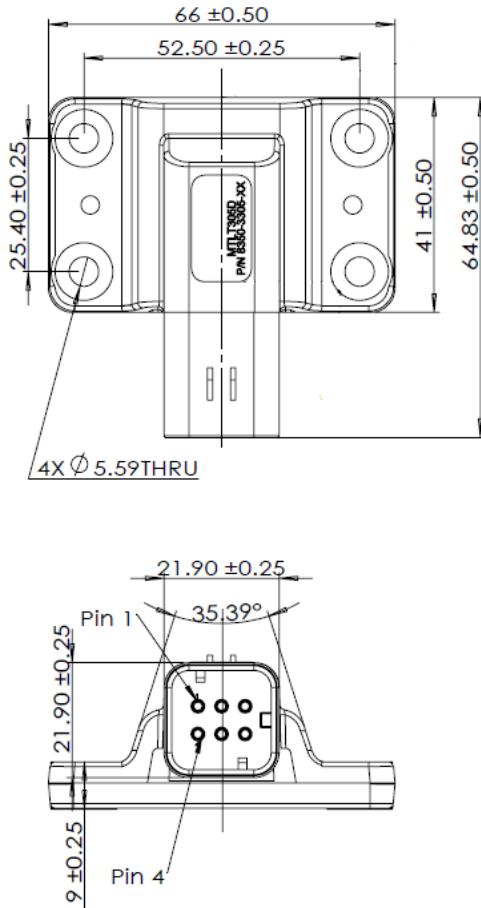

**Figure 2 MTLT305E Outline Drawing**

Mating Connector: TE Connectivity 776531-1 or equivalent. See Figure 1.

### 2.2.1 Recommended Mounting Hardware and Torque

Use 4 - M5 Alloy Steel Socket Head Screws to secure the MTLT305E.

It is recommended to use standard M5 washer with outer diameter of 10mm, lock washer and Loctite 242 thread lock.

The washer outer diameter must NOT be larger than the outer diameter of the bushing (11mm).

MTLT305E – Torque the screws to 5.0 N·m (44.25 inch-pounds).

### 3 Theory of Operation

The MTLT305E is a dynamic inclination, rotational rate and acceleration sensor. It provides dynamic pitch and roll, 3D linear acceleration, and 3D estimated rotation rate measurement data. Pitch and roll rate data can be selected to be raw or bias corrected. Yaw rate is not bias corrected.

Figure 3 shows the MTLT305E Series hardware block diagram. At the core of the MTLT305E is a rugged 6-DOF (Degrees of Freedom) MEMS inertial sensor cluster. The 6-DOF MEMS inertial sensor cluster includes three axes of MEMS angular rate sensing and three axes of MEMS linear acceleration sensing. These sensors are based on rugged, field proven silicon micromachining technology. Each axis within the cluster is individually factory calibrated using ACEINNA's automated manufacturing process. Sensor errors compensated for are temperature bias, scale factor, non-linearity and misalignment effects using a proprietary algorithm from data collected during manufacturing. Accelerometer and rate gyro sensor bias shifts over temperature (-40 °C to +85 °C) are compensated and verified using calibrated thermal chambers and precision rate tables.

The acceleration sensors have a full-scale range (FSR) of  $\pm 78 \text{ ms}^{-2}$ , and the rate sensors have a FSR of 400 degrees/s. The large FSR ensures that the sensors are not over-ranged in the application. Both the acceleration and rate sensors are over sampled at greater than 1000 Hz, and digitally processed through a 3<sup>rd</sup> order configurable low-pass filter (LPF). The acceleration and rate sensors' LPFs can be set independently. The default setting for the rate data is 25 Hz and the default setting for the acceleration data is 5 Hz. Over sampling and LPF combined together eliminate higher frequency vibration and impulse energy providing greater accuracy in high-vibration environments.

The filtered data is then corrected for temperature related errors and non-linearity by ACEINNA's proprietary compensation algorithm using data collected during ACEINNA's calibration process.

This dataset is used to generate the dynamic roll and pitch estimation and are stabilized by using the rate sensors for short term angle estimation and the accelerometers as a long-term reference using the gravity vector. Internally, the algorithm solves for roll and pitch at a 200 Hz rate, enabling the MTLT305E to continuously maintain the dynamic roll and pitch data as well as the 3D linear acceleration and 3D angular rate data. The Yaw estimation (RS232 only) is a free integrating yaw angle measurement that is not stabilized by a magnetometer or compass heading. As shown in the software block diagram Figure 4, after the Sensor Calibration block, the temperature corrected and filtered data are passed into Integration to Orientation block. The Integration to Orientation block integrates body frame sensed angular rate to orientation at a fixed 200 times per second within the MTLT305E Series products. For improved accuracy and to avoid singularities when dealing with the Euler angles, a quaternion formulation is used in the algorithm to provide attitude propagation.

As also shown in the software block diagram, the Integration to Orientation block receives drift corrections from the Extended Kalman Filter (EKF) or Drift Correction Module. In general, rate sensors and accelerometers suffer from bias drift, misalignment errors, acceleration errors (g-sensitivity), nonlinearity (square terms), and scale factor errors. The largest error in the orientation propagation is associated with the rate sensor bias terms. The EKF module provides an on-the-fly calibration for drift errors, including the rate sensor bias, by providing corrections to the Integration to Orientation block and a characterization of the gyro bias state. In the MTLT305E,

---


the internally computed gravity reference vector provides a reference measurement for the EKF when the MTLT305E is in quasi-static motion to correct roll and pitch angle drift and to estimate the X and Y gyro rate bias. Because the gravity vector has no horizontal component, the EKF has no ability to estimate either the yaw angle error or the Z gyro rate bias. The MTLT305E adaptively tunes the EKF feedback in order to best balance the bias estimation and attitude correction with distortion free performance during dynamics when the object is accelerating either linearly (speed changes) or centripetally (false gravity forces from turns). Additionally there is a time qualified TurnSwitch angle threshold which lowers EKF gain during long duration turn events which could create a false gravity vector. Time qualification is set as 50 seconds in the factory. See section 5.1.6.8 for Turn switch angle threshold setting.

The MTLT305E algorithm has two major phases of operation. The first phase of operation is the initialization phase. During the initialization phase, the MTLT305E is expected to be stationary or quasi-static in order to get a good initial estimation of the roll and pitch angles, and X, Y rate sensor bias. The initialization phase lasts less than 2 seconds, and the initialization status can be determined by monitoring the FOM bits in the CAN SSI or SSI2 messages, see section 5.1.7, or in the softwareStatus BIT transmitted by default in each RS232 measurement packet. After the initialization phase, the MTLT305E operates in the dynamic mode to continuously estimate and correct for roll and pitch errors, as well as to estimate X and Y rate sensor bias.

If a user wants to reset the algorithm or re-enter the initialization phase, sending the algorithm reset command, ‘AR’, will force the algorithm into the reset phase.


The MTLT305E outputs digital measurement data over the CAN or RS232 port at a selectable fixed rate (100, 50, 25, 20, 10, 5 or 2 Hz) or on as requested basis.

In addition to the configurable baud rate, packet rate, axis orientation, and sensor low-pass filter settings, the MTLT305E provides additional advanced settings, which are selectable for tailoring the MTLT305E to a specific application requirement.

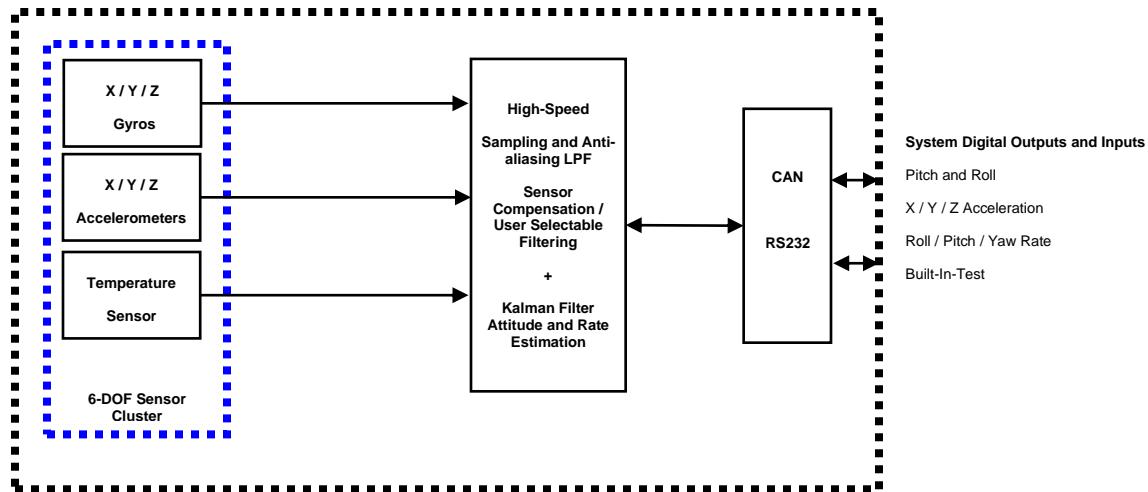

**Figure 3 MTLT305E Series Hardware Block Diagram**

Figure 4 shows the software block diagram. As shown in the software block diagram, the MTLT305E Series has a unit setting and profile block which configures the algorithm to user and application specific needs.

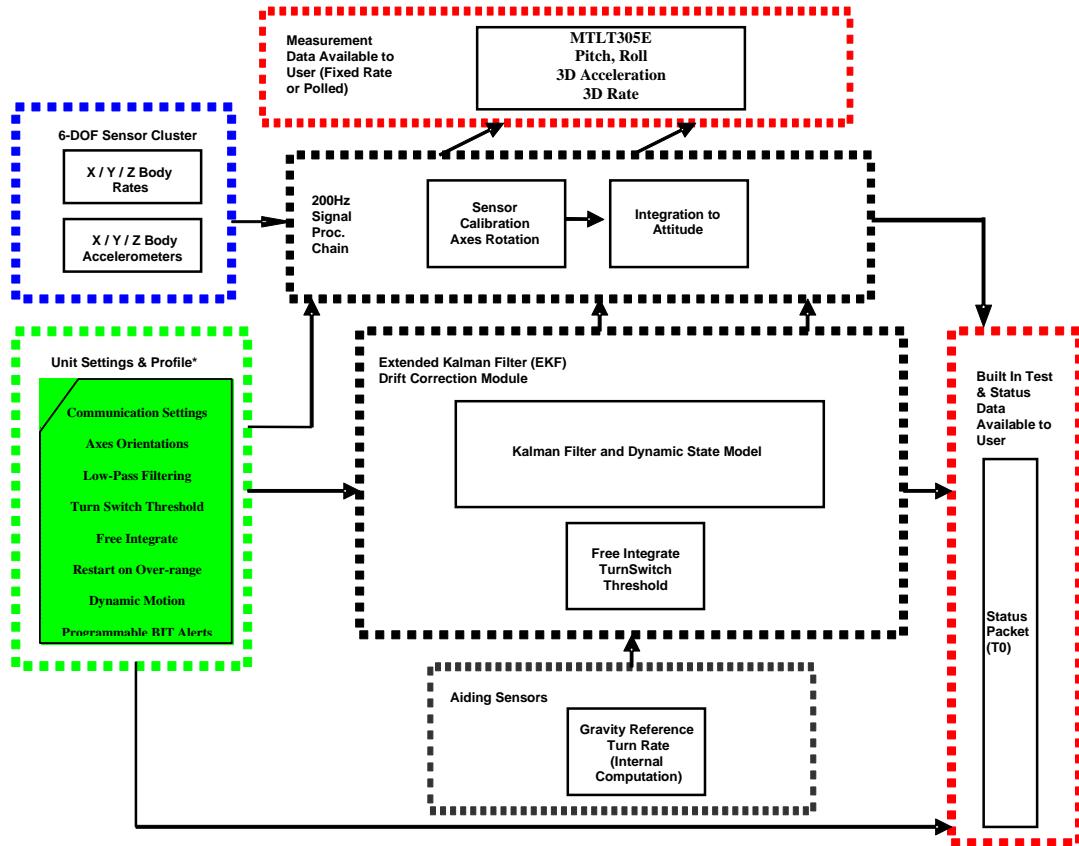


**Figure 4 MTLT305E Series Software Block Diagram**

The common aiding sensor for the drift correction for the attitude (i.e., roll and pitch only) is a 3-axis accelerometer. This is the default configuration for the MTLT305E products.

### 3.1 MTLT305E Series Default Coordinate System

The MTLT305E default coordinate systems are shown in Figure 5. As with many elements of the MTLT305E Series, the coordinate system is configurable with either NAV-VIEW or by sending the appropriate serial commands over the CAN or RS232 port. These configurable elements are

known as *Advanced Settings*. This section of the manual describes the default coordinate system settings of the MTLT305E Series when it leaves the factory

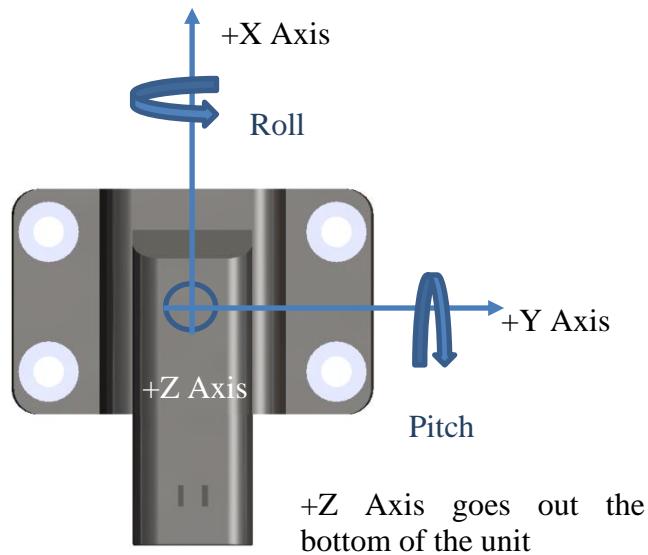

**Figure 5. MTLT305E Default Coordinate Frame**

The axes form an orthogonal SAE right-handed coordinate system. Acceleration is positive when it is oriented towards the positive side of the coordinate axis. For example, with a MTLT305E Series product sitting on a level table, it will measure zero g along the x and y-axes and -1 g along the z-axis. Normal Force acceleration is directed upward, and thus will be defined as negative for the MTLT305E Series z-axis. Note the above applies to the RS232 data which uses NED convention. CAN J1939 standard defines acceleration message using a NWU frame. CAN acceleration message default used NWU but can be configured to NED. See Section 5.1.6.7.

The angular rate sensors are aligned with these same axes. The rate sensors measure angular rotation rate around a given axis. The rate measurements are labeled by the appropriate axis. The direction of a positive rotation is defined by the right-hand rule. With the thumb of your right hand pointing along the axis in a positive direction, your fingers curl around in the positive rotation direction. For example, if the MTLT305E Series product is sitting on a level surface and you rotate it clockwise on that surface, this will be a positive rotation around the z-axis. The x and y-axis rate sensors would measure zero angular rates, and the z-axis sensor would measure a positive angular rate.

Pitch is defined positive for a positive rotation around the y-axis (pitch up). Roll is defined as positive for a positive rotation around the x-axis (roll right). Yaw is defined as positive for a positive rotation around the z-axis (turn right).

“The angles are defined as standard Euler angles using a 3-2-1 system. To rotate from the earth-level frame to the body frame, yaw first, then pitch, and then roll.

### ***3.1.1 Axis Orientation Settings***

The MTLT305E gives users the ability to set the axes orientation by selecting which axis aligns with the base axes as well as the sign. The only constraint is the axes must conform to a right-hand definition. The available settings are described in Section 8.4. The specific selections are provided in Table 86. The default setting is (+Ux, +Uy, +Uz).

Refer to CAN Protocol Section 0 for instructions on changing the orientation for your application over the CAN bus.

Refer to RS232 Protocol Section 8.4 for instructions on changing the orientation for your application over the RS232 Port.

## **3.2 Digital Filter**

The MTLT305E contains a set of configurable 3rd order low pass filters, which enable independent settings for filtering the accelerometer and the rate-sensor signals. The filters are 3<sup>rd</sup> order Butterworth filters that can be set to 50, 40, 25, 20, 10, and 5 Hz cutoff frequencies. One setting applies to all three of a sensor's axes.

Filter defaults for Acceleration and rate sensors are 5 and 25 Hz respectively.

### ***3.2.1 Acceleration Filter Settings***

Decreasing the accelerometer filter cutoff frequency will reduce transmission of the acceleration noise to the algorithm and enable the system to better estimate roll and pitch angles (as well as rate-sensor bias) under noisy idle-conditions (such as vibration caused by engine noise). The filter will not have a large effect on the estimate of the roll and pitch angles during motion, as the role of the accelerometer is reduced during motion and angles are estimated by integrating the rate-sensor signal. Default factory configuration is 5Hz.

Refer to CAN Protocol Section 5.1.6.5 for instructions on changing the acceleration sensor filter for your application over the CAN bus.

Refer to RS232 Protocol Section 8.3 for instructions on changing the acceleration sensor filter for your application over the RS232 Port.

### ***3.2.2 Rate Sensor Filter Settings***

Decreasing the rate-sensor filter cutoff frequency will reduce transmission of the vibrational noise to the algorithm and enable the system to generate less noisy roll and pitch angle estimates under noisy conditions (such as vibration caused by engine noise). However, very low cutoff frequency settings can increase lag in the signal, which may affect system performance. Settings must be made based on system requirements. Default Factory setting and firmware default are 25Hz.

Refer to CAN Protocol Section 5.1.6.5 for instructions on changing the rate sensor filter setting for your application over the CAN bus.

---

Refer to RS232 Protocol Section 8.3 for instructions on changing the rate sensor filter for your application over the RS232Port

## ◀ NOTE on Filter Settings

Why change the filter settings? Generally, there is no reason to change the low-pass filter settings on the MTLT305E Series Inertial Systems. However, when a MTLT305E Series product is installed in an environment with a lot of vibration, it can be helpful to reduce the vibration-based signal energy and noise prior to further processing on the signal. Installing the MTLT305E in the target environment and reviewing the data with NAV-VIEW can be helpful to determine if changing the filter settings would be helpful. Although the filter settings can be helpful in reducing vibration-based noise in the signal, low pass filter settings (e.g., <10Hz) also reduce the bandwidth of the signal, i.e., can wash out the signals containing the dynamics of a target. Treat the filter settings with caution.

## 4 Diagnostic Features

MTLT305E design incorporates the following safety features:

- Upon startup the MTLT305E performs self-diagnostics. If during self-diagnostics there are serious problems detected with the sensors, the unit will cease sending out sensors data and set corresponding bits in the status register. Also, it will periodically send out a diagnostic message (see PGN 65362). Other diagnostic messages are available on demand (see 5.1.4.7, 5.1.4.8 and 5.1.4.9). In case of severe hardware failures, the unit will disconnect itself from the CAN bus to prevent compromising of system data traffic.
- The MTLT305E constantly monitors its vital configuration/calibration data and will notify master unit of failures by setting corresponding bits in status registers and/or sending diagnostics message PGN 65362. In the event that calibration tables are compromised, the unit will stop transmitting output data.
- The MTLT305E hardware is designed such that it will be automatically disconnected from CAN bus when it's internal core or power supply are compromised.
- The MTLT305E will report degradation of its health – power over consumption, power supply failure, and temperature of sensors is outside of sensor temperature calibration range, or unexpected delays in data processing by setting bits in status registers and sending out diagnostics messages.
- Upon restart, the MTLT305E will report the cause of the restart event by setting specific bits in status registers and/or sending out diagnostic message.

## 5 CAN Port Interface Definition

The CAN interface of MTLT supports the CAN protocol version 2.0B. It has been designed to manage high rates of incoming messages efficiently and meets the priority requirements for transmit message.

MTLT305E supports baud rates of 250kbps, 500Kbps, and 1Mbps, and supports automatic baud rate detection (see section 5.1.3.2).

### 5.1 SAE J1939

The MTLT305E supports CAN's higher layer protocol, SAEJ1939, managing the communication within network. J1939 is a set of standards defined by SAE. The physical layer (J1939/11) describes the electrical interface to the bus. The data link layer (J1939/21) describes the rules for constructing a message, accessing the bus, and detecting transmission errors. The application layer (J1939/71 and J1939/73) defines the specific data contained within each message sent across the network.

J1939 uses the 29-bit identifier defined within the CAN 2.0B protocol shown in Table 4.

**Table 4. Structure of a 29-bit identifier**

Priority	Reserved	Data Page	PDU Format	PDU Specific	Source Address
3 bits	1 bit	1bit	8 bits	8 bits	8 bits

The first three bits of the identifier are used for controlling a message's priority during the arbitration process. A value of zero has the highest priority. Higher priority values are typically given to high-speed control messages.

The next bit of the identifier is reserved for the future use and should be set to zero for transmitted message.

The next bit of the identifier is the data page selector.

The PDU format determines whether the message can be transmitted with a destination address or if the message is always transmitted as a broadcast message.

The interpretation of the PDU specific field changes based on the PF value:

- If the PF is between 0 and 239, the message is addressable, and the PS field contains a destination address
- If the PF is between 240 and 255, the message can only be broadcast. The PS field contains a Group Extension.

The term Parameter Group Number (PGN) is used to refer to the value of the Reserve bit, DP, PF, and PS fields combined into a single 18-bit value.

The last 8 bits of the identifier contain the address of the device transmitting the message.

### 5.1.1 ECU's Address

Each device on the network will be associated with one address. The device address defines a specific communications source or destination for messages. The default CAN address for the MTLT305E is 0x80 (128).

The allowed range of unit addresses on the CAN bus is from 128 to 247.

Address 255 is reserved as a global address for broadcast and address 254 is reserved as the “null address” used by devices that have not yet claimed an address or failed to claim an address.

It's possible to assign arbitrary unit address from serial interface as well as from CAN bus.

### 5.1.2 Address Claim

In general, most ECU addresses on the CAN bus are pre-assigned and used immediately upon power up. In order to permit J1939 to accommodate future devices and functions, a procedure has been specified for dynamically assigning addresses. This procedure is defined according to J1939. Each device must announce its own address.

In the case of the MTLT305E, the device will announce its address once upon initialization and retain it unless/until another unit with the same address challenges it. The format of the Address Claim message is defined by J1939, and described below:

**Table 5. MTLT305E Address Claim Message**

Priority	PGN	PF	PS	SA	Payload
6	60928	238	DA	128*	8 bytes

\* By default, the MTLT305E will claim the address 128 (0x80), and this address can be re-programmed using the “Unit Behavior” command.

The Address Claim message payload contains 8 bytes as described in the Table below. This payload can be considered as 64-bit unsigned integer representing the ECU Name. In case of a conflict, the device which has the smaller value of this integer wins the conflict, and the device which lost the competition will switch to the next higher available address and repeat the address claim process.

The MTLT305E will also send out address claim message if another node on the network explicitly requests it.

**Table 6. MTLT305E Address Claim Payload**

Bits	Contents	Value
63	Arbitrary Address	1
62:60	Industry Group	0
59:56	Vehicle System Instance	0
55:49	System Bits	0

Bits	Contents	Value
48	Reserved	0
47:40	Function Bits	145
39:35	Function Instance	0 Appendix B
34:32	ECU Bits	0
31:21	Manufacturer code	823
20:0	ID bits	Unit SN – least significant bits

The MTLT305E firmware supports dynamic address conflict resolution. If the device address is already used by another ECU on the same network, the device will attempt to claim another address. The device transmits the address claim message once on startup, and thereafter only in case of an address conflict. Baud Rate

### 5.1.3 Manual Baud Rate Configuration

The J1939 network is intended to be a single, linear, shielded twisted pair of wires running around the vehicle to each ECU. The default data rate of J1939 is 250Kbps. A typical message containing 8 bytes is 128 bits long, which in time is approximately 500 microseconds. MTLT305E also supports lower speed, 125Kbps and higher speeds, 500Kbps and 1000Kbps.

The baud rate of MTLT is configurable through the RS232 interface using NAV-VIEW.

### 5.1.4 Auto Baud Detection

Auto baud detection supports 250kb/s, 500kb/s and 1000kb/s. The MTLT305E is configured at the factory for a baud rate of 250kbps. This value is stored in non-volatile memory. When power is applied (or any time the power is cycled), the unit will select a starting baud rate, which will be the last baud rate stored in non-volatile memory and will put itself into Silent Baud Discovery Mode.

In this mode, the unit will listen silently, without transmitting or asserting the Acknowledge bit, and uses an automated error counter mechanism incorporated into its CAN peripheral controller. It checks the error counter at 10ms intervals. At each 10ms interval, the unit checks both the error counter, and the CAN FIFO buffer for a valid 29-bit message identifier. One of three cases can occur:

1. If there is a valid 29-bit message identifier, and the error counter is at zero, the unit will lock to the current baud rate.
2. If the error counter crosses a programmable threshold (default = 20 counts), or if the error counter increases for three sequential 10ms periods, then the unit will switch to the next supported baud rate, clear the message FIFO buffer, and continue monitoring at this new baud rate.
3. Otherwise, the unit will continue monitoring at 10ms intervals, at the current baud rate, until case 1 or case 2 occurs.

## ◀ NOTE

An 11-bit standard frame message will not be considered valid while the unit is in Silent Baud Discovery Mode.

The list of supported baud rates is 250kbps, 500kbps, and 1Mbps, and the MTLT305E will cycle indefinitely in that order, beginning with the last value stored in non-volatile memory, until the baud rate is successfully detected.

In normal operation (after Baud Discovery Mode has ended), the unit will maintain a counter which keeps a running count of CAN errors. Each time it detects an RX error, it increments the error counter by +1. Each time it detects a TX error, it increments the error counter by +8; each time it successfully transmits or receives an error free message, it decrements the error counter by 1. If the error counter reaches 255, the unit will go to the “bus off” state and enter silent Baud Discovery Mode (as described above).

### 5.1.5 *Get Commands*

Get commands are used for another ECUs on the network to collect the corresponding message from MTLT305E. All of the commands are formed by a Request message of SAEJ1939-21 PGN number 60159. The format of the request message payload provided in Table 7.

**Table 7. The format of request message payload**

Byte 0	Byte 1	Byte 2
Requested PGN (LSB)	Requested PGN	Requested PGN (MSB)

## ◀ NOTE

In old FW versions of the MTLT305D, Byte 0 and Byte 2 were reversed. This has been corrected in the newest firmware of the MTLT305D and in all versions of the MTLT305E, but there is a configuration bit available to make it backward compatible with older versions of the MTLT305D (See Unit Behavior Settings).

## ◀ NOTE

Payload of all responses for Get commands are padded to 8 bytes to make messages look uniform on the bus.

#### 5.1.5.1 *Software Identification*

There are two different possible response to a request for Software ID and ECU ID depending upon the setting of the Bit 5 of the first byte of the Unit Behavior. See Section 5.1.6.7, Table 45. Bit 5 of the first byte of the Unit Behavior setting changes both the ECU ID and the SW ID responses. With default setting (not enabled) the unit will respond to firmware version request PGN 65242 by sending back a set of transport protocol packets containing ASCII presentation of unit application and bootloader versions. Control sequence for retrieval of firmware version is found in Appendix E.

### 5.1.5.2 Rate of periodic data packets

Upon receiving a request for parameter with PGN 65365 (current rate value of periodic packets) from another ECU on the network, MTLT305E responds with a packet, containing a 2-byte payload. Table 8 shows the format of the response.

**Table 8. The format of packet rate divider response packet**

Priority	PGN	PF	PS	SA	Payload
6	65365	255	85		2 bytes

The payload consists of the address of requesting unit and current rate value of periodic packets in MTLT305E. See Table 9.

**Table 9. Packet rate response payload**

Byte 0	Byte 1
Destination Address	Packet rate (see Table 35)

### 5.1.5.3 Periodic Data Packets Control Settings

Upon receiving request for parameter with PGN 65366 (periodic data packets control) from another ECU on the network MTLT305E responds with a packet, containing 4-byte payload. Table 10 shows the format of the response.

**Table 10. The format of data packet types response packet**

Priority	PGN	PF	PS	SA	Payload
6	65366	255	86		4 bytes

The response payload consists of address of requesting unit and bitmasks which represents currently enabled periodic packet types and priorities of these packets See Table 11.

**Table 11. Packet types response payload**

Byte 0	Byte 1	Byte 2	Byte 3
Destination Address	Packet types (LSB) (see Table 37)	Packet types (MSB) (see Table 37)	Priorities for ACCS/ARI/SSI messages (see Table 38)

It is also possible to request a specific data packet from MTLT305E. The request payload should contain PGN of the specific data packet (see 5.1.7)

### 5.1.5.4 Digital Filters

Upon receiving a request for parameter with PGN 65367 (digital filters settings) from another ECU on the network, MTLT305E responds with a packet, containing a 3-byte payload. Table 12 and Table 13 shows the format of the response.

**Table 12. The format of digital filters response packet**

Priority	PGN	PF	PS	SA	Payload
6	65367	255	87		3 bytes

The response payload consists of address of requesting unit and currently active filters for accelerometers and rate sensors data. See Table 13.

**Table 13. Active digital filters response payload**

Byte	Description	Default Setting (Hz)
0	Destination Address (Address of unit responding)	
1	Rate filter cutoff frequency	25
2	Acceleration cutoff frequency	5

#### 5.1.5.5 Axis Orientation

Upon receiving a request for parameter with PGN 65368 (Axis orientation settings) from another ECU on the network, MTLT305E responds with a packet, containing a 3-byte payload. Table 14 shows the format of the response.

**Table 14. The format of unit orientation response packet**

Priority	PGN	PF	PS	SA	Payload
6	65368	255	88		3 bytes

The response payload consists of address of requesting unit and current unit orientation settings. See Table 15.

**Table 15. Unit orientation response payload**

Byte 0	Byte 1	Byte 2
Destination Address	Orientation (MSB) See Section 5.1.6.6	Orientation (LSB) See Section 5.1.6.6

#### 5.1.5.6 ECU's ID

Unit will respond to ECU ID request PGN 64965 by sending back a set of transport protocol (TP) packets containing ASCII presentation of unit part number and serial number. Protocol for retrieval ECU ID provided in Appendix C.

#### 5.1.5.7 Master BIT status word

Upon receiving a request for parameter with PGN 65364 (master BIT status request) from another ECU on the network, the MTLT305E responds with a packet with a 4-bytes payload. Table 16 shows the format of the Master BIT response packet.

**Table 16. The format of Master Bit response packet**

Priority	PGN	PF	PS	SA	Payload
6	65364	255	84		4 Bytes

Table 17 shows the content and definition of the bits in the Master BIT status response payload.

**Table 17. Master BIT response payload**

Bit	Description	Value	Solution
0	MasterFail	0 = normal; 1 = fatal error has occurred.	Check Master BIT payload bits 1-15 for information on failure type.
1	HW Error	0 = normal; 1 = any of the Failure bit in Hardware BIT status are set (see Table 21) OR Over temperature bits persists for more than 5 minutes.	Reset or power cycle can be tried to recover unit. If not recovered after power cycle the unit should be replaced.
2	SW Error	0 = normal; 1 = any of the Error bit in Software BIT is set (see Table 19).	Reset or power cycle can be tried to recover unit. If not recovered after power cycle the unit should be replaced.
3	Configuration Error	0 = normal; 1 = incorrect configuration parameters detected during initialization or periodic self-test.	Unit needs to be reset by command or power cycled. If state persists after power cycle – unit considered to be damaged and needs to be replaced.
4	Calibration Error	0 = normal; 1 = calibration data for all three sensor chips are corrupted (see Table 21)	Unit needs to be reset by command or power cycled. If state persists after power cycle – unit considered to be damaged and needs to be replaced.
5	Accelerometer Quality Degradation	0 = normal; 1 = Data Processing delay exceeds 5ms for more than 10 consecutive cycles, OR Over Range	Unit may still work normally. To recover from this condition unit needs to be reset by command or power cycled.
6	Rate Sensor Quality Degradation	0 = normal; 1 = OR Data Processing delay exceeds 5ms for more than 10 consecutive cycles, OR Over Range	Unit may still work normally. To recover from this condition unit needs to be reset by command or power cycled.
7	Forced Restart	0 = normal; 1 = forced restart (restart caused by watchdog, brownout or transmit queue congestions)	Check SW BIT[22:24] for cause of restart
8	Application CRC Error	0 = normal; 1 = Application CRC error detected	Will be sent from Bootloader periodically with interval of 1 second

Bit	Description	Value	Solution
9	Tx Overflow Error	0 = normal; 1 = Tx Overflow occurred 10 consecutive cycles	This bit resets when overflow condition is cleared OR the unit will restart automatically when this error persists for more than 20 seconds.
10	Reserved	Reserved (FCF)	
11:15	Reserved	Reserved	
16:31	Application CRC	Contains application CRC value for reference	

## ◀ NOTE

Master BIT status word will be also periodically broadcasted on the CAN bus in case if unit triggered fatal internal error (right upon occurrence and every second after that). Bus master then can send request for additional status information.

### 5.1.5.8 Software BIT status

Upon receiving a request for parameter with PGN 65363 (Software BIT status request) from another ECU on the network, the MTLT305E will respond with a packet with 4-bytes payload. Table 18 shows the format of the Software BIT status response packet.

**Table 18. The format of Software BIT status response**

Priority	PGN	PF	PS	SA	Payload
6	65363	255	83		4 Bytes

## ◀ NOTE

The PS value for this command can be changed using the command “Bank of PS numbers” PS Bank 0.

Table 19 shows the content and definition of the packet.

**Table 19. Software BIT status payload fields**

Bit	Description	Value	Solution
0	Stack Overflow Error	0=normal; 1= stack is 95% full	
1	Algorithm Error	0=normal, 1=error (initialization took more than 5 seconds).	
2	Initialization Status	0=normal; 1= Algorithm is in the initialization stage and unit is not ready. Bit will be cleared after initialization is complete (~2s).	
3	Reserved		

Bit	Description	Value	Solution
4:6	Accelerometer Over Range Status	0=normal; 1= Indicates an over range event, (acceleration exceeds 7.95g). It is cleared when condition is removed. This condition will set SW Error flag in Master BIT status if Sensor Over Range persists more than 20 ms.	Algorithm can be reset using command which can be sent over CAN bus (PGN 65360) or by power cycling unit. If condition persists when system is not moving, after power cycle, the unit is considered faulty and should be replaced.
7:9	Rate Sensor Over Range Status	0=normal; 1= Indicates an over range event, (rotation exceeding 410 dps). It is cleared when condition is removed. EKF will converge to correct solution or Algorithm can be reset. The SW will set SW Error flag in Master BIT status if Sensor Over Range persists more than 20 mS.	Algorithm can be reset using command which can be sent over CAN bus (PGN 65360) or by power cycling unit. If condition persists when system is not moving, after power cycle, the unit is considered faulty and should be replaced.
10	Configuration Error	0=normal, 1=incorrect configuration parameters detected during initialization or periodic self-test.	Unit needs to be reset or power cycled. If state persists after power cycle – unit considered to be faulty and needs to be replaced.
11	Calibration Data Status	0=normal, 1= non-recoverable error of unit calibration data (bad CRC) detected during initialization or periodic self-test. In this case unit will automatically exclude affected sensor from the solution	Unit needs to be reset or power cycled. If state persists after power cycle, and degradation of unit performance is also detected – unit considered to be damaged and needs to be replaced.
12:21	Reserved		
22:24	Last Reset Status	000 = Power-On reset 001 = Software (self-reset) 100 = Watchdog reset 101 = Brown-out reset 110 = Transmit queue congestion Reset bit in Master BIT status will be set when cause of last reset is Watchdog or Brown-out reset	
25	Data Processing Over Run Status	0 = no overrun 1 = Data Processing Delay exceeded 5ms. SW Error bit and Accel/Rate Sensor Quality Degradation bits will be set in Master BIT status when Over Run persist for more than 10 data processing cycles.	

Bit	Description	Value	Solution
26	Turn Switch Status	0=off, 1=yaw rate greater than Turn Switch threshold	
27	Algorithm Mode Status	0 = low gain mode, 1 = high gain mode	
28	Transmit queue overflow Error	0=normal, 1 = Unit transmit queue overflow occurred due to the errors or CAN bus congestion. If this condition persists more than 10 cycles, Tx Overflow Error bit is set in Master BIT Status.	This bit resets when overflow condition is cleared

### 5.1.5.9 HW BIT status

Upon receiving a request for parameter with PGN 65362 (HW BIT status request) from another ECU on the network, the MTLT305E responds with a packet with 2-bytes status message.

**Table 20** shows the format of unit HW status response message.

**Table 21** shows the contents and definition of unit status response payload.

**Table 20. The format of HW BIT status message**

Priority	PGN	PF	PS	SA	Payload
6	65362	255	82		2 bytes

## ◀ NOTE

The PS value for this command can be changed using the “Bank 0” command.

**Table 21. Hardware BIT status payload fields**

Bit	Description	Value	Solution
0	Power consumption Error	0 = normal 1 = unit consumes excessive amount of power for more than 1 minute.	Check power supply
1	External power supply Error	0 = normal 1 = external power supply voltage is not within specified thresholds for more than 1 minute.	Check power supply
2	Internal power supply Error	0 = normal 1 = Overvoltage or under voltage on internal power supply for more than 1 minute.	Check power supply

Bit	Description	Value	Solution
3	Over Temperature Environment	0 = normal 1 = MCU temperature exceeds allowed limit Set HW Error in Master BIT Status when temp is 5 deg. over the max temp limit or 5 deg. below min temp limit, for more than 5 minutes.	Cool down the unit
4	Over Temperature Sensor	0 = normal 1 = Sensor temperature exceeds allowed limit. Set HW Error in Master BIT Status when temp is 5 deg. over the max temp limit or 5 deg. below min temp limit, for more than 5 minutes.	
5 : 6	Reserved		
7	Sensor Communication Status	0 = normal, 1 = communication with sensor failed on startup or during runtime self-test.	Unit needs to be reset by command or power cycled. If state persists after power cycle – unit considered to be damaged and needs to be replaced.
8 : 15	Reserved	Reserved	

### 5.1.5.10 Unit behavior

Upon receiving a request for parameter with PGN 65369 (current unit behavior configuration) from another ECU on the network, the MTLT305E responds with a packet, containing 2-byte payload. **Table 22** shows the format of the response.

**Table 22. The format of unit behavior response packet**

Priority	PGN	PF	PS	SA	Payload
6	65369	255	89		2 bytes

### ◀ NOTE

The PS value for this command can be changed using the “Bank 1” command in case of PGN conflict.

The response payload consists of the address of requesting unit (Byte 0) and the current unit behavior bitmask. When value of specific bit equal to 1 it means that corresponding option is enabled. See **Table 23**.

**Table 23. The format of the unit behavior response payload**

Byte	Bit	Description	FW Default	As shipped
0	7:0	Destination Address (address of responding unit)	0x80	0x80
1	0	Enable Suppress DM1 Message when there is no fault	1	0
	1	Reserved (DM)	1	1
	2	Use raw rates (not bias corrected by EKF) in ARI message	0	1
	3	Change sequence of ARI and ACCS messages from X, Y, Z (like MTLT305D) to Y, X, Z (J1939) in all ARI and ACCS messages	1	1
	4	Enable Auto Baud detection mode	1	1
	5	Reserved	0	0
	6	Use North West Up (NWU) acceleration Frame (0 = NED)	1	1
	7	Use unfiltered acceleration as input to Linear Acceleration detection in Extended Kalman Filter	1	1
2	0	Use raw rates (not bias corrected by EKF) to predict acceleration in extended Kalman Filter	0	0
	1	Swap byte - Swap Byte 2 and Byte 0 in a GET Message Request payload for backward compatibility with earlier FW versions of 305D, see Section 5.1.5	0	0
	2	Reserved	0	0
	3		0	0
	4	Reserved	0	0
	5	Enable Averaging at ODR	0	1
	6	Reserved	0	0
	7	Enable VG algorithm (Attitude estimation)	1	1

### 5.1.5.11 In System Alignment

The MTLT305E responds to a J1939 request PGN 65378 (In-System alignment control) packet with a message containing an 8-byte payload. Table 24 shows the format of this In-System Alignment Control response.

---

Table 25 shows the format of in-system alignment control response.

**Table 24. The format of in-system alignment control response**

Priority	PGN	PF	PS	SA	Payload
6	65378	255	92		8 bytes

**Table 25. In-system alignment control command payload**

Byte	Description	Value	Address of destination
0	Destination address	DA	Address of destination device.
1	Order of adjustment	0 - NONE 1 - XYZ 2 - YZX 3 - ZXY 4 - XZY 5 - ZYX 6 - YXZ 7 - ZXZ 8 - XYX 9 - YZY 10 - ZYZ 11 - XZX 12 - YXY 13 – 15 N/A	
2	Euler angle of first axis of rotation	LSB	-64 to 64.51 degrees. 0.002 deg/bit Offset = -64 degrees
3	Euler angle of first axis of rotation	MSB	
4	Euler angle of second axis of rotation	LSB	-64 to 64.51 degrees. 0.002 deg/bit Offset = -64 degrees
5	Euler angle of second axis of rotation	MSB	
6	Euler angle of third axis of rotation	LSB	-64 to 64.51 degrees. 0.002 deg/bit Offset = -64 degrees
7	Euler angle of third axis of rotation	MSB	

#### 5.1.5.12 Algorithm Control

The MTLT305E responds to a J1939 request PGN 65371 (Algorithm control) packet with a message containing an 8-byte payload. Table 26 shows the format of this Algorithm Control response.

**Table 26. The format of the algorithm control response packet**

Priority	PGN	PF	PS	SA	Payload
6	65371	255	91		8 bytes

**Table 27. The format of the Algorithm control response payload**

Byte	Description	Value	Comment
0	Address of Unit	Destination Address	
1	Turn Switch Threshold	Value in deg/s	From 1 to 255 Default = 6 dps (No effect in excavator mode)
2	Reserved		
3	Reserved		
4	Limit for accelerometer switch delay	LSB	Value in milliseconds From 10 to 10000 Default = 2000 mS
5	Limit for accelerometer switch delay	MSB	Not used in Excavator Mode
6	Coefficient of reduced Q	LSB	Scale 0.0001 per lsb
7	Coefficient of reduced Q	MSB	From 0.0001 to 1

#### 5.1.5.13 DMI Message Configuration

The MTLT305E responds to a J1939 request PGN 65370 (DMI message configuration) packet with a message containing 8-byte payload. Table 28 shows the format of the response.

**Table 28. DMI Configuration response message format**

Priority	PGN	PF	PS	SA	Payload
6	65370	255	90		8 bytes

**Table 29. Response Payload Content**

Byte	Bits	Parameter name	Default Values
0	DA	Destination address	
1	2-1	Protect Lamp Status	00
	4-3	Amber Warning Lamp Status	01
	6-5	Red Stop Lamp Status	00
	8-7	Malfunction Indicator Lamp Status	00
2	2-1	Flash Protect Lamp	11
	4-3	Flash Amber Warning Lamp	11
	6-5	Flash Red Stop Lamp	11
	8-7	Flash Malfunction Indicator Lamp	11
3	8-1	SPN, 8 least significant bits of SPN	0xB3
4	8-1	SPN, second byte of SPN (most significant at bit 8)	0xF4
5	3-1	SPN, 3 most significant bits (most significant at bit 8)	0x07
6		FMI for DTC1	0x0C
7		FMI for DTC2	0x0E

### 5.1.6 Set Commands

Set commands are used for other ECUs to configure the MTLT305E on the network. All the commands are broadcast messages with a destination address. The receivers will decode the payload and decide to ignore the message meant for another ECU.

#### 5.1.6.1 Configuration Save

The command is issued by an ECU on the network to the destination unit who is requested to save the current configuration in RAM to EEPROM. The receiver will send a response back and notify the sender that the save command has been executed successfully or not. If Request field equals 2 unit will reset itself after sending back the response. It is recommended to normally set the Request field = 2.

**Table 30** shows the format of the save configuration command. **Table 31** is the description of save configuration command and response payload.

**Table 30. The Format of Save Configuration**

Priority	PGN	PF	PS	SA	Payload
6	65361	255	81		3 bytes

**Table 31. Save Configuration Command / Response Payload**

Byte	Description	Value
0	Save Mode	0 = No reset after Save 2 = Reset after save 1 = Response message
1	Address of target or responding unit	Address of target or responding unit
2	Success or failure indicator	0 = failure, 1 = success

#### 5.1.6.2 Algorithm Reset

The algorithm reset command is issued by an ECU on the network to the destination unit which is requested to its reset algorithm. The receiver will send a response back and notify the sender that the re-initialization of algorithm has been executed successfully or not. If Request field equals 2 unit will reset itself after sending back the response. Table 32 shows the format of the algorithm reset command.

**Table 32. The format of algorithm reset command**

Priority	PGN	PF	PS	SA	Payload
6	65360	255	80		3 bytes

The description of the algorithm reset data field is shown in

---

Table 33.

**Table 33. Algorithm Reset Command / Response Payload**

Byte	Description	Value
0	Reset Mode	0 = Reset Algorithm Only 2 = Complete Device Reset 1 = Response message
1	Address of target or responding unit	Address of target or responding unit
2	Success or failure indicator	0 = failure, 1 = success

#### 5.1.6.3 Packet Rate Divider

The MTLT305E broadcasts several types of data packet, as defined in Table 37. The default ODR of data packets is 100Hz. The Packet rate divider command is used to change the ODR setting. The 1<sup>st</sup> byte of the payload is the destination address, and the 2<sup>nd</sup> byte of the payload sets the new ODR. Table 34 shows the format of packet rate divider command. The values of packet rate divider are defined in Table 35.

**Table 34. The format of packet rate divider command**

Priority	PGN	PF	PS	SA	Payload
6	65365	255	85		2 bytes

**Table 35. Packet Rate Divider Field Definition**

Byte Value	Packet broadcasting rate
0	Quiet mode
1	100Hz (default)
2	50Hz
4	25Hz
5	20Hz
10	10Hz
20	5Hz
25	4Hz
50	2Hz

#### 5.1.6.4 Data Packets Control settings

User can configure the combination of output packets and priority of those output packets. MTLT305E's data packet type and default priorities of these data packets follows SAEJ1939-DA Table SPNs & PGN.

Users can choose any combination of output packets from the following data packets - slope sensor information 2 (PGN 61481), angular rate information (PGN 61482) acceleration sensors (PGN

61485), high resolution acceleration sensors (PGN 65389), high resolution rate sensors (PGN 65387), slope sensor information (PGN 61459).

The 1<sup>st</sup> byte of the payload is the destination address. 2<sup>nd</sup> byte of the payload describes the packet type to be set. 3<sup>rd</sup> payload byte is reserved, any value written to the payload byte 3 will be ignored. 4<sup>th</sup> byte of the payload contains bitmask of priorities which can be assigned to specific packet type. 5<sup>th</sup> byte contains bitmask which enables change of the priority of specific packet. Table 36**Error! Reference source not found.** shows the format of data packet type command.

**Table 36. The format of Data Packet Type command**

Priority	PGN	PF	PS	SA	Payload
6	65366	255	86		5 bytes

The 2<sup>nd</sup> byte is a bitmask and used to select which data messages are to be transmitted. To select specific message type set specific bit to 1. Any combination of messages can be selected for transmission. See Table 37.

**Table 37. Data Packet Type Field Definition (2<sup>nd</sup> byte)**

Bit Number	Selected Data Packet Type
0	SSI2
1	Angular Rate
2	Acceleration
3	HR Angular Rate
4	HR Acceleration
5	SSI

The 4th byte is a bitmask and used to select priority of specific message types.

The 5th byte is a bitmask and used to enable change of priority of specific message types. Priority can be changed for any or all messages at the same time.

**Table 38. Priority of Data Packets (4th byte)**

Bit Number	Bit fields assignment
1:0	Angular Rate & HR Angular Rate Packets Priority (0 - 3) <sup>1</sup>
3:2	Acceleration & HR Acceleration Packets Priority (0 - 3) <sup>1</sup>
5:4	SSI & SSI2 Packets Priority (0 - 3) <sup>1</sup>
7:6	Reserved

<sup>1</sup> Priority of both the data packets will be changed when these bits are configured

**Table 39. Priority Change enable mask (5th byte)**

Bit Number	Bit fields assignment
1:0	Enable of changing Angular Rate & HR Angular Rate Packets Priority (11 – enable, other – disable)
3:2	Enable of changing Acceleration & HR Acceleration Packets Priority (11 – enable, other – disable)
5:4	Enable of changing SSI & SSI2 Packets Priority (11 – enable, other – disable)
7:6	Reserved

### 5.1.6.5 Digital Filter

The MTLT305E contains a set of configurable 3<sup>rd</sup> order low pass filters, one for the angular rate cutoff frequency, and the other for the acceleration cutoff frequency. The supported frequencies settings are: 5, 10, 20, 25, 40, and 50 Hz and off. The frequencies are changed by the command issued by another ECU on the network. Setting a value of 0 turns the filter off. Turning the filters off is not recommended.

Table 40 and Table 41 show the format of digital filter setting command.

Valid values for bytes 1 – 4 are: 5, 10, 20, 25, 40, 50 and 0 (off).

**Table 40. The format of digital filter change command**

Priority	PGN	PF	PS	SA	Payload
6	65367	255	87		3 bytes

**Table 41. Active digital filters Command payload**

Byte	Description	Default Setting (Hz)
0	Destination Address	
1	Rate filter cutoff frequency	25
2	Acceleration cutoff frequency	5

If configuration is lost or corrupted, firmware will use default filter settings.

### 5.1.6.6 Orientation

Users may change the coordinate system of MTLT305E via the command issued by another ECU on the network. The default factory axis setting for the MTLT305E orientation field is logical positive axes (X, Y, Z) = physical device axes (+Ux, +Uy, +Uz) which defines the connector pointing to the opposite of +X direction and +Z direction going out the bottom of the unit.

The 1st byte of payload is the destination address and the next 2 bytes (MSB first) define the orientation to be applied. Table 42. shows the format of unit orientation control command. Table 43 shows the possible orientation settings.

**Table 42. The format of the unit orientation command**

Priority	PGN	PF	PS	SA	Payload
6	65368	255	88		3 bytes

**Table 43. Possible values of the orientation**

Orientation Field Value	X Axis	Y Axis	Z Axis
0x0000 (Default)	+Ux	+Uy	+Uz
0x0009	-Ux	-Uy	+Uz
0x0023	-Uy	+Ux	+Uz
0x002A	+Uy	-Ux	+Uz
0x0041	-Ux	+Uy	-Uz
0x0048	+Ux	-Uy	-Uz
0x0062	+Uy	+Ux	-Uz
0x006B	-Uy	-Ux	-Uz
0x0085	-Uz	+Uy	+Ux
0x008C	+Uz	-Uy	+Ux
0x0092	+Uy	+Uz	+Ux
0x009B	-Uy	-Uz	+Ux
0x00C4	+Uz	+Uy	-Ux
0x00CD	-Uz	-Uy	-Ux
0x00D3	-Uy	+Uz	-Ux
0x00DA	+Uy	-Uz	-Ux
0x0111	-Ux	+Uz	+Uy
0x0118	+Ux	-Uz	+Uy
0x0124	+Uz	+Ux	+Uy
0x012D	-Uz	-Ux	+Uy
0x0150	+Ux	+Uz	-Uy
0x0159	-Ux	-Uz	-Uy
0x0165	-Uz	+Ux	-Uy
0x016C	+Uz	-Ux	-Uy

#### 5.1.6.7 Unit behavior

The user can choose any combination of MTLT305E behaviors. Table 44 shows the format of unit behavior command.

**Table 44. The format of Unit Behavior command**

Priority	PGN	PF	PS	SA	Payload
6	65369	255	89		6 bytes

The first payload byte is destination address.

The next 4 payload bytes are used to enable/disable specific unit behavior settings. To enable a specific behavior, the corresponding bit in byte 1 or 2 should be set to 1. To disable a specific

behavior, the corresponding bit in byte 3 or 4 should be set to 1. The “disable” bits will override any “enable” bits if sent in the same message. This method allows individual behaviors to be turned on or off, without the need to “remember” the other settings (a zero in any bit location will leave that setting unchanged). Unit behavior settings can be permanently saved using the “Configuration Save” command (PGN 65361). The Unit Behavior payload is described in Table 45.

**Table 45. Unit behavior payload**

Byte	Bit	Description
0	7:0	Destination Address (address of responding unit)
Enable Behavior Bit Mask (bytes 1 and 2)		
1	0	Enable Suppress DM1 Message when there is no fault
	1	Reserved (DM)
	2	Use raw rates (not bias corrected by EKF) in ARI message
	3	Change sequence of ARI and ACCS messages from X, Y, Z (like older MTLT305D FW versions) to Y, X, Z (J1939) in all ARI and ACCS messages
	4	Enable Auto Baud detection mode
	5	Reserved
	6	Use North West Up (NWU) acceleration Frame (0 = NED)
	7	Use unfiltered acceleration as input to Linear Acceleration detection in Extended Kalman Filter
2	0	Use raw rates (not bias corrected by EKF) to predict acceleration in extended Kalman Filter
	1	Swap byte - Swap Byte 2 and Byte 0 in a GET Message Request payload for backward compatibility with older MTLT305D FW versions, see Section 5.1.5
	2	Reserved
	3	Reserved
	4	Reserved (EFC)
	5	Enable Averaging at ODR
	6	Reserved
	7	Enable VG algorithm (Attitude estimation)
Disable Behavior Bit Mask (Bytes 3 and 4)		
3	0	Disable Suppress DM1 Message when there is no fault
	1	Reserved (DM)
	2	Disable use raw rates (not bias corrected by EKF) in ARI message
	3	Disable change sequence of ARI and ACCS messages from X, Y, Z (like older FW versions) to Y, X, Z (J1939) in all ARI and ACCS messages
	4	Disable Auto Baud detection mode

Byte	Bit	Description
	5	Reserved
	6	Disable Use North West Up (NWU) acceleration Frame
	7	Disable use unfiltered acceleration as input to Linear Acceleration detection in Extended Kalman Filter
4	0	Disable use raw rates (not bias corrected by EKF) to predict acceleration in extended Kalman Filter
	1	Disable Swap byte - Swap Byte 2 and Byte 0 in a GET Message Request payload for backward compatibility with older MTLT305D FW versions, see Section 5.1.5
	2	Reserved
	3	Reserved
	4	Reserved (EFC)
	5	Disable Averaging at ODR
	6	Reserved
	7	Disable VG algorithm (Attitude estimation)
5	7:0	New Unit address assignment (valid address from 128 to 247). Will become active after save with reset command issued to device.

#### 5.1.6.8 Algorithm Control

The user can adjust certain algorithm parameters which can improve MTLT305E performance. Table 46 shows the format of the algorithm control command.

**Table 46. Format of the Algorithm control command**

Priority	PGN	PF	PS	SA	Payload
6	65371	255	91		8 bytes

**Table 47. Algorithm control command payload**

Byte	Description	Value	Comment
0	Address of Unit	Destination Address	
1	Turn Switch Threshold	Value in deg/s	From 1 to 255 Default = 6 dps
2	Reserved	Reserved	
3	Reserved	Reserved	
4	Limit for accelerometer switch delay	LSB	Value in milliseconds From 10 to 10000 Default 2000 mS
5	Limit for accelerometer switch delay	MSB	
6	Coefficient of reduced Q	LSB	Scale 0.0001 per lsb

Byte	Description	Value	Comment
7	Coefficient of reduced Q	MSB	From 0.0001 to 1 (Default 0.001)

## ◀ NOTE

Coefficient of reduced Q should not be adjusted without first consulting with ACEINNA

### 5.1.6.9 In-System Alignment

The user can finely adjust virtual alignment of the unit which was already installed on carrier for up to  $\pm 64$  degrees in along each axis.

Table 48 shows the format of in-system alignment control command.

**Table 48. The format of in-system alignment control command**

Priority	PGN	PF	PS	SA	Payload
6	65378	255	98		8 bytes

**Table 49. In-system alignment control command payload**

Byte	Description	Value	Comment
0	Address of Unit	Destination Address	Address of destination device.
1	Order of adjustment	0 - NONE 1 - XYZ 2 - YZX 3 - ZXY 4 - XZY 5 - ZYX 6 - YXZ 7 - ZXZ 8 - XYX 9 - YZY 10 - ZYZ 11 - XZX 12 - YXY 13 – 15 N/A	
2	Euler angle of first axis of rotation	LSB	-64 to 64.51 degrees. 0.002 deg/bit Offset = -64 degrees
3	Euler angle of first axis of rotation	MSB	
4	Euler angle of second axis of rotation	LSB	-64 to 64.51 degrees. 0.002 deg/bit Offset = -64 degrees
5	Euler angle of second axis of rotation	MSB	

Byte	Description	Value	Comment
6	Euler angle of third axis of rotation	LSB	-64 to 64.51 degrees. 0.002 deg/bit Offset = -64 degrees
7	Euler angle of third axis of rotation	MSB	

## ◀ NOTE

Settings programmed by this command are applied only after “Configuration Save” command with Reset, or “Configuration Save” command followed by reset, or power cycle.

## ◀ NOTE

### 5.1.6.10 DM1 Message Configuration

The IMU can send out DM1 diagnostic messages in case of failures. This message allows to configure specific fields of DM1 messages.

**Table 50. DM1 Configuration response message format**

Priority	PGN	PF	PS	SA	Payload
6	65370	255	90		8 bytes

**Table 51. DM1 Configuration payload detail**

Byte	Bits	Parameter name	Default Values
1	DA	Destination address	
2	2-1	Protect Lamp Status	00
	4-3	Amber Warning Lamp Status	01
	6-5	Red Stop Lamp Status	00
	8-7	Malfunction Indicator Lamp Status	00
3	2-1	Flash Protect Lamp	11
	4-3	Flash Amber Warning Lamp	11
	6-5	Flash Red Stop Lamp	11
	8-7	Flash Malfunction Indicator Lamp	11
4	8-1	SPN, 8 least significant bits of SPN	0xB3
5	8-1	SPN, second byte of SPN (most significant at bit 8)	0xF4
6	3-1	SPN, 3 most significant bits (most significant at bit 8)	0x07
7		FMI for DTC1	0x0C
8		FMI for DTC2	0x0E

## ◀ NOTE

The DM1 messages can be enabled and disabled. To disable message for specific DTC set FMI value to 0xFF.

### 5.1.6.11 Bank of PS numbers

Users may change the default PS numbers of proprietary MTLT305E PGNs if the pre-configured values have already been used in their system. PS numbers can be re-assigned anywhere in the range from 0x40 to 0x6C (64 to 108). The three commands below are issued by user's ECU and sent to the MTLT305E in order to change the corresponding PS values. Table 52, Table 53 and Table 54 shows the format of these three commands. The MTLT305E will decode these incoming packets and switch the default PS numbers to the values assigned by users. The new PS numbers will take effect immediately and can be permanently saved. Note that PF numbers for all proprietary PGNs have value 255.

**Table 52. The format of PS Bank0 command**

Priority	PGN	PF	PS	SA	Payload
6	65520	255	240		8 bytes

**Table 53. The format of PS Bank1 command**

Priority	PGN	PF	PS	SA	Payload
6	65521	255	241		8 bytes

**Table 54. The format of PS Bank2 command**

Priority	PGN	PF	PS	SA	Payload
6	65522	255	242		8 bytes

The Bank0, Bank1 and Bank2 payloads each contain 8 bytes, where each byte value represents the newly assigned PS number for the corresponding Get or Set command. See **Table 55** and **Table 56** for a description of which byte corresponds with which command. Note if a byte value of zero is detected, that particular field will be ignored (the PS number is not changed).

**Table 55. Bank0 Command Payload**

Byte	Default PS	Command / Function associated with corresponding Byte
0	N/A	Destination Address
1	80	Algorithm Reset
2	81	Save Configuration
3	82	HW BIT Status
4	83	SW BIT Status
5	84	Master BIT Status
6	107	HR Angular Rate
7	109	HR Acceleration

**Table 56. Bank1 Command Payload**

Byte	Default PS	Command / Function associated with corresponding Byte
0	N/A	Destination Address
1	85	Packet Rate Divider
2	86	Packet Type(s)
3	87	Digital Filter
4	88	Orientation
5	89	Unit Behavior
6	91	Algorithm Control
7		Reserved

**Table 57. Bank2 Command Payload**

Byte	Default PS	Command / Function associated with corresponding Byte
0	N/A	Destination Address
1	95	Aiding Signal Configuration
2	96	Aiding Signal LeverArm Configuration
3	90	DM1 Message Configuration
4 - 7		Reserved

### 5.1.7 Data Packets

The MTLT305E can be configured to periodically output any combination of six different data packets. These packets are slope sensor information and slope sensor information 2, angular rate and acceleration sensor defined by SAEJ1939-DA, and custom high-resolution acceleration and angular rate packets.

Device temperature information is also available but it is not supported as a broadcast message. Get command is used to read temperature information on demand. See section 5.1.7.7.

#### 5.1.7.1 Slope Sensor Information 2

The payload contains 8 bytes in little-endian mode and follows the definition of SLOT 294 and SAEad11 found in SAEJ1939-DA. The first 24-bits is the pitch value and the next 24-bits is the roll value. See the Tables below for details about the format and payload of the message.

**Table 58. The format of SSI2 packet**

Priority	PGN	PF	PS	SA	Payload
3	61481	240	41		8 bytes

**Table 59. Payload of the SSI2 packet**

Bytes	Parameter name	Units	Scaling	Data Range	Offset
1-3	Pitch Angle (Extended Range)	°	1/32768 °/Bit	-250 to 252	-250
4-6	Roll Angle (Extended Range)	°	1/32768 °/Bit	-250 to 252	-250
7.1, 2	Pitch Angle Compensation	-	00=On		
7.3, 4	Pitch Angle FOM	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A. See Table 60		
7.5, 6	Roll Angle Compensation	-	00=On		
7.7, 8	Roll Angle Figure of FOM	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A. See Table 60		
8	Roll and Pitch Latency	ms	0.5 ms/Bit	0 to 125	0

**Table 60. SSI2 FOM Definition**

Value	Conditions	Action
00	All Conditions are normal	No Action Required
01	Degraded for one or more of the following. <ul style="list-style-type: none"> <li>a. Turn switch threshold exceeded for more than 50 seconds</li> <li>b. <math> Acceleration  &gt; 4g</math> for 20 ms</li> <li>c. <math> Rate  &gt; 410</math> dps for 20 ms</li> <li>d. Data processing timings compromised</li> </ul>	Momentary indication can be ignored For Persistent indication: <ul style="list-style-type: none"> <li>a. Read Master, HW, SW BIT to get more information on cause of condition.</li> <li>b. Try Reset or power cycle to clear condition</li> <li>c. Replace device if condition persists and does not clear after reset or power cycle</li> </ul>
10	The Output is in error due to one or both of the following condition <ul style="list-style-type: none"> <li>a. Algorithm is initializing – Clears once algorithm has initialized. You will see this at power on.</li> <li>b. Algorithm is in error state: initialization did not complete or overflow of pitch/roll values</li> <li>c. <math> Rate Sensor  &gt; 500</math> dps</li> </ul>	Momentary indication can be ignored For Persistent indication: <ul style="list-style-type: none"> <li>a. Read Master, HW, SW BIT to get more information on cause of condition.</li> <li>b. Try Algorithm Reset or power cycle to clear condition</li> <li>c. Replace device if condition persists and does not clear</li> </ul>
11	This value is not used	

### 5.1.7.2 Slope Sensor Information

The payload contains 8 bytes in little-endian mode and follows up the definition of message with PGN 61459 found in SAEJ1939-DA. The first 16-bit is the pitch angle value, next 16 bit is roll angle value and following 16 bit is pitch rate value. See the Tables below for a description of the format and payload of the SSI message.

**Table 61. The format of SSI packet**

Priority	PGN	PF	PS	SA	Payload
3	61459	240	19		8 bytes

**Table 62. Payload of the SSI Packet**

Bytes	Parameter name	Units	Scaling	Data Range	Offset
1 – 2	Pitch Angle	°	0.002	-64 to 64.51	-64
3 – 4	Roll Angle	°	0.002	-64 to 64.51	-64
5 - 6	Pitch Rate	°/s	0.002	-64 to 64.51	-64
7.1,2	Pitch Angle FOM	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A. See Table 60		
7.3,4	Roll Angle FOM	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A. See Table 60		
7.5,6	Pitch Rate FOM	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A. See Table 65		
7.7,8	Pitch and Roll Comp	-	00=On, 01=Off, 10=Error, 11=N/A		
8	Roll and Pitch Latency	ms/bit	0.5ms/bit	0 to 125	0

### 5.1.7.3 Angular Rate

The payload contains 8 bytes in little-endian mode and follows the definition of SLOT 288 and SAEva03 found in SAEJ1939-DA. Each of 16 bits is sequentially allocated to the angular velocity in Y, X, and Z per the J1939 standard. See the Tables below for a description of the message format and payload.

**Table 63. The format of angular rate packet**

Priority	PGN	PF	PS	SA	Payload
3	61482	240	42		8 bytes

**Table 64. ARI Payload Description**

Bytes	Parameter name	Units	Scaling	Data Range	Offset
1 – 2	Pitch Angular Rate	°/s	1/128 °/s/Bit	-250 to 250.99	-250
3 – 4	Roll Angular Rate	°/s	1/128 °/s/Bit	-250 to 250.99	-250
5 - 6	Yaw Angular Rate	°/s	1/128 °/s/Bit	-250 to 250.99	-250
7.1, 2	Pitch Rate FOM (Extended Range)	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A. See <b>Table 65</b>		
7.3, 4	Roll Rate FOM (Extended Range)	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A. See <b>Table 65</b>		
7.5, 6	Yaw Rate FOM (Extended Range)	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A. See <b>Table 65</b>		
8	Angular Rate Measurement Latency	ms	0.5 ms/Bit	0 to 125	0

## ◀ NOTE

By default, the Angular rate packet is arranged in the sequence Pitch, Roll, and Yaw rates, as specified by the J1939 standard. This is different from the previous generation MTLT305E, which defines the message sequence as Roll, Pitch, and Yaw rate. It's possible to switch the sequence of X and Y in the message for backward compatibility (See Unit Behavior Settings).

## ◀ NOTE

It is possible to configure the Angular rate packet to provide either raw or corrected (for bias) angular rates. See Unit Behavior settings for more information.

**Table 65. ARI FOM Definition**

Value	Conditions	Action
00	All Conditions are normal	No Action Required
01	Degraded for one or more of the following. a. $ Rate  > 250$ deg/s b. Data processing timings compromised	Momentary indication can be ignored For persistent indication: a. Read Master, HW, SW BIT to get more information on cause of condition. b. Try Reset or power cycle to clear condition c. Replace MTLT305E if condition persists and does not clear

Value	Conditions	Action
10	The Output is in error due to one or both of the following condition a. Persistent Over Range b. Value exceeds CAN message range	Momentary indication can be ignored For persistent indication: a. Read Master, HW, SW BIT to get more information on cause of condition. b. Try Reset or power cycle to clear condition c. Replace MTLT305E if condition persists and does not clear
11	This Value is not used	

See Appendix E Appendix F: FOM and BIT Examples for more information

#### 5.1.7.4 High Resolution Angular Rate

The payload contains 8 bytes in little-endian mode. Rate Sensors data transmitted in 19-bit words sequentially allocated to the angular velocity, Y, X and Z. For each, the range is within -250 to 250.992 deg/s and the resolution is 1/1024 deg/s/bit, with an offset of -250 degrees/second. Table 66 shows the format of angular rate message.

**Table 66. The format of High-Resolution angular rate packet**

Priority	PGN	PF	PS	SA	Payload
3	65387	255	107		8 bytes

**Table 67. HR Angular Rate Payload Description**

Bits	Parameter name	Units	Scaling	Data Range	Offset
0 - 18	Pitch Angular Rate	°/s	1/1024 °/s/Bit	-250 to 250.99	-250
19 - 37	Roll Angular Rate	°/s	1/1024 °/s/Bit	-250 to 250.99	-250
38 - 56	Yaw Angular Rate	°/s	1/1024 °/s/Bit	-250 to 250.99	-250
57 - 58	Pitch Rate FOM (Extended Range)	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A		
59 - 60	Roll Rate FOM (Extended Range)	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A		
61 - 62	Yaw Rate FOM (Extended Range)	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A		
63	Reserved				

#### ► NOTE

By default, the Angular rate packet is arranged in the sequence Pitch, Roll, and Yaw rates, as specified by the J1939 standard. This is different from earlier firmware versions of the

MTLT305D, which defined the message sequence as Roll, Pitch, and Yaw rate. It's possible to switch the sequence of X and Y in the message for backward compatibility (See Unit Behavior Settings).

## ◀ NOTE

It's possible to configure the Angular rate packet to provide either raw or corrected (for bias) angular rates. See Unit Behavior settings for more information.

### 5.1.7.5 Acceleration Sensor

The payload contains 8 bytes in little-endian mode, and follows the definition of SLOT 303 and SAEad11 found in SAEJ1939-DA. Each of 16 bits is sequentially allocated to the acceleration in Y, X and Z. See the Tables below for details of the message format and payload.

**Table 68. The format of acceleration sensor packet**

Priority	PGN	PF	PS	SA	Payload
2	61485	240	45		8 bytes

**Table 69. ACCS Payload Description**

Bytes	Parameter name	Units	Scaling	Data Range	Offset
1 – 2	Acceleration Y axis	m/s <sup>2</sup>	0.01 m/s <sup>2</sup> /Bit	-320 to 322.55	-320
3 – 4	Acceleration X axis	m/s <sup>2</sup>	0.01 m/s <sup>2</sup> /Bit	-320 to 322.55	-320
5 - 6	Acceleration Z axis	m/s <sup>2</sup>	0.01 m/s <sup>2</sup> /Bit	-320 to 322.55	-320
7.1, 2	Lateral Acceleration FOM	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A. See Table 70		
7.3, 4	Longitudinal Acceleration FOM	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A. See Table 70		
7.5, 6	Vertical Acceleration FOM	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A. See Table 70		
7.7, 8	Support Var Tx rep Accel	-	10=20ms Transmission Rate Supported, 11=only 10ms Transmission Rate Supported.		

## ◀ NOTE

By default, the Acceleration packet is arranged in the sequence Y, X, and Z, and in the North-West-Up orientation, as specified by the J1939 standard. This is different from previous FW versions of the MTLT305D, which defined the message sequence as X, Y, and Z, and North-East-Down orientation. For backward compatibility, it's possible to switch the sequence of X and Y in the message, and also to switch to NED orientation (See Unit Behavior Settings).

**Table 70. ACCS FOM Definition**

Value	Conditions	Action
00	All Conditions are normal	No Action Required
01	Degraded for one or more of the following. <ul style="list-style-type: none"> <li>a. <math> \text{Acceleration}  &gt; 7.9\text{g}</math> for 20 ms</li> <li>b. Data processing timings compromised</li> </ul>	Momentary indication can be ignored For persistent indication: <ul style="list-style-type: none"> <li>a. Read Master, HW, SW BIT to get more information on cause of condition.</li> <li>b. Try Reset or power cycle to clear condition</li> <li>c. Replace OpenIMU335RI if condition persists and does not clear</li> </ul>
10	The Output is in error due to one or both of the following condition <ul style="list-style-type: none"> <li>a. Persistent Over Range</li> <li>b. acceleration sensor failed</li> </ul>	Momentary indication can be ignored For persistent indication: <ul style="list-style-type: none"> <li>a. Read Master, HW, SW BIT to get more information on cause of condition.</li> <li>b. Try Reset or power cycle to clear condition</li> <li>c. Replace OpenIMU335RI if condition persists and does not clear</li> </ul>
11	This Value is not used	

#### 5.1.7.6 High Resolution Acceleration Sensor data

The payload contains 8 bytes in little-endian mode. Each of 16 bits is sequentially allocated to the acceleration in Y, X, and Z, and in the NWU orientation. As with the ACCS message, it's possible to change both the sequence of X and Y, and also change to NED orientation (See Unit Behavior Settings). See the Tables below for more details on the format and payload for this message.

**Table 71. The format of HR acceleration sensor packet**

Priority	PGN	PF	PS	SA	Payload
2	65389	255	109		8 bytes

**Table 72. HR Acceleration Payload Description**

Bits	Parameter name	Units	Scaling	Data Range	Offset
0 –18	Acceleration Y axis	$\text{m/s}^2$	0.00125 $\text{m/s}^2/\text{Bit}$	-320 to 322.55	-320
19 –37	Acceleration X axis	$\text{m/s}^2$	0.00125 $\text{m/s}^2/\text{Bit}$	-320 to 322.55	-320
38 -56	Acceleration Z axis	$\text{m/s}^2$	0.00125 $\text{m/s}^2/\text{Bit}$	-320 to 322.55	-320

Bits	Parameter name	Units	Scaling	Data Range	Offset
57, 58	Lateral Acceleration FOM	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A		
59, 60	Longitudinal Acceleration FOM	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A		
61,62	Vertical Acceleration FOM	-	00=Fully Functional, 01=Degraded, 10=Error, 11=N/A		
63	Support Var Tx rep Accel	-	1=20ms Transmission Rate Supported, 0=only 10ms Transmission Rate Supported.		

#### 5.1.7.7 Unit Temperature

Unit temperature is not available as a broadcast message. It is obtained using a get command. Upon receiving a request for parameter with PGN 65373 (unit temperature) from another ECU on the network, MTLT305E responds with a packet, containing a 2-byte payload. The payload contains 2 bytes in little-endian mode and follows the definition of SLOT 358 and SAEtp04. See Table 73 and Table 74 for a description of the message format and payload. This message will be returned to the user upon request.

**Table 73. Format of Unit Temperature Response Packet**

Priority	PGN	PF	PS	SA	Payload
6	65373	255	93		2 bytes

**Table 74. Scaling of Unit temperature payload (SLOT 358)**

Bytes	Parameter name	Units	Scaling	Data Range	Offset
1 - 2	Unit Temperature	°C	1/128 °C/Bit	-273 to 228.992 °C	-273 °C

#### 5.1.8 Diagnostic Messages DMI

MTLT305E sends DM1 message with 1 second interval to indicate its health. In case of failures, message will contain DTC to indicate the problem. The format of messages is defined in SAEJ1939-73. Two DTC are defined:

DTC 1: Failure indication which requires restart of unit:

This message will be sent out if unit detects the following critical errors:

Critical HW Error:

- Supply current over limit (~2x nominal) for > 1 min
- Internal power supply voltage out of range for > 1 min
- MCU temperature 5C over limit for > 5 mins
- Sensor over temperature limit by 5C for > 5mins

Critical SW Error:

- Stack overflow (>95% full)
- Algorithm error - when Algorithm is not initialized five seconds after startup.

Data processing delay exceeds 5ms for more than 10 cycles (50ms)  
 TX queue overflow for more than 10 cycles (50ms)

Fatal Error:

Calibration CRC Error  
 Internal SPI Communication Error for > 10 cycles (50ms)  
 Configuration CRC Error

DTC 2: Failure indication which requires reprogramming unit:

This message will be sent out if unit detected the following critical errors:

Application CRC Error

#### 5.1.8.1 DM1 Message Format

This message has default SPN 521395 use FMI values 12 and 14. But SPN and FMI values can be configured. The format of DM1 messages provided below:

**Table 75. The format of DM1 packet**

Priority	PGN	PF	PS	SA	Payload
6	65226	254	202		8 bytes

**Table 76. DM1 messages payload (default)**

Byte	Bits	Parameter name	Values DTC 1	Values DTC2
1	2-1	Protect Lamp Status	00	00
	4-3	Amber Warning Lamp Status	01	01
	6-5	Red Stop Lamp Status	00	00
	8-7	Malfunction Indicator Lamp Status	00	00
2	2-1	Flash Protect Lamp	11	11
	4-3	Flash Amber Warning Lamp	11	11
	6-5	Flash Red Stop Lamp	11	11
	8-7	Flash Malfunction Indicator Lamp	11	11
3	8-1	SPN least significant byte	0xB3	0xB3
4	8-1	SPN middle byte	0xF4	0xF4
5	8-6	SPN 3 most significant bits	0x7	0x7
	5-1	FMI	0x0C	0x0E
6	7-1	Occurrence Count		
8	8	SPN Conversion Method	0	0
		Reserved	0xFF	0xFF
8		Reserved	0xFF	0xFF

## ◀ NOTE

Regular transmission of DM1 message when there is no failure or DTC can be disabled using bit 0 of the Unit Behavior switches. See section 5.1.6.7

## ◀ NOTE

The DM1 messages can be enabled and disabled. To disable the message for specific DTC set the corresponding FMI value to 0xFF.

### 5.1.8.2 DTC Reset

The user can decide to reset/clear an active DTC condition. It can be done by sending the DM11 message to unit. DM11 message has the following format:

**Table 77. The format of DTC Reset Packet**

Priority	PGN	PF	PS	SA	Payload
6	65235	254	211		0 bytes

Upon reception of this message unit will clear active DTC and send back positive acknowledgement with the following format:

**Table 78. The format of DTC Reset Response**

Priority	PGN	PF	PS	SA	Payload
6	59392	232	255		8 bytes

**Table 79 Acknowledgement message payload**

Byte	Parameter name	Value DTC 1
1	Control byte	0
2	Group function value	0
3	Reserved	0xFF
4	Reserved	0xFF
5	Reserved	0xFF
6	DM11 PGN (LSB)	0xD3
7	DM11 PGN (2nd byte)	0xFE
8	DM11 PGN (MSB)	0x00

## 5.2 DBC File

A DBC file is a proprietary but common descriptor database file that is used to describes the CAN network and message decoding. DBC files are created and administered with either the CANdb editor or the CANdb++ editor available from Vector.

The format of DBC file follows the definition of Vector DBC Standard. The link is [https://vector.com/vi\\_candb\\_en.html](https://vector.com/vi_candb_en.html)

A simplified description of DBC file is available on <https://github.com/stefanhoelzl/CANpy/tree/master/docs>. However, users must contact Vector if the full syntax of DBC file is desired.

A DBC file supporting ACEINNA MTLT305E is available for download from ACEINNA website from the MTLT305E Product page.

## 6 RS-232 Port Interface Definition

The MTLT305E supports a common packet structure that includes both command or input data packets (data sent to the MTLT305E) and measurement output or response packet formats (data sent from the MTLT305E). This section of the manual explains these packet formats as well as the supported commands. [Navigation studio](#) also features a number of tools that can help a user understand the packet types available and the information contained within the packets. This section of the manual assumes that the user is familiar with ANSI C programming language and data type conventions.

### 6.1 General Settings

The serial port settings are RS232 with 1 start bit, 8 data bits, no parity bit, 1 stop bit, and no flow control. Standard baud rates supported are 38400, 57600, 115200, 230400. Default is 115200.

#### ◀ NOTE

The boot loader used to update firmware always uses 57600 baud rate.

Common definitions include:

- A word is defined to be 2 bytes or 16 bits.
- All communications to and from the unit are packets that start with a single word alternating bit preamble 0x5555. This is the ASCII string “UU”.
- All multiple byte values are transmitted Big Endian (Most Significant Byte First).
- All communication packets end with a single word CRC (2 bytes). CRC’s are calculated on all packet bytes excluding the preamble and CRC itself. Input packets with incorrect CRC’s will be ignored.
- Each complete communication packet must be transmitted to the MTLT305E Series inertial system within a 4 second period.

### 6.2 Number Formats

Number Format Conventions include:

- 0x as a prefix to hexadecimal values
- single quotes (‘’) to delimit ASCII characters
- no prefix or delimiters to specify decimal values.

**Table 80. Number Formats**

Descriptor	Description	Size (bytes)	Comment	Range
U1	Unsigned Char	1		0 to 255

Descriptor	Description	Size (bytes)	Comment	Range
U2	Unsigned Short	2		0 to 65535
U4	Unsigned Int	4		0 to $2^{32}-1$
I2	Signed Short	2	$2^7$ s Complement	$-2^{15}$ to $2^{15}-1$
I2*	Signed Short	2	Shifted $2^7$ s Complement	Shifted to specified range
I4	Signed Int	4	$2^7$ s Complement	$-2^{31}$ to $2^{31}-1$
F4	Floating Point	4	IEEE754 Single Precision	$-1 \cdot 2^{127}$ to $2^{127}$
D	Double	8	IEEE-754 Double Precision	$2.23 \cdot 10^{-308}$ to $1.80 \cdot 10^{308}$
SN	String	N	ASCII	

### 6.3 Packet Format

All of the Input and Output packets, except the Ping command, conform to the following structure:

0x5555	<2-byte packet type (U2)>	<payload byte-length (U1)>	<variable length payload>	<2-byte CRC (U2)>
--------	---------------------------	----------------------------	---------------------------	-------------------

To Ping a MTLT305E Series unit, type the ASCII string ‘UUPK’. If properly connected, the MTLT305E Series unit will respond with ‘PK’. All other communications with the MTLT305E Series unit require the 2-byte CRC. (Note: A MTLT305E Series unit will also respond to a ping command using the full packet formation with payload 0 and correctly calculated CRC. Example: 0x5555504B009ef4).

#### 6.3.1 Packet Header

The packet header is always the bit pattern 0x5555.

#### 6.3.2 Packet Type

The packet type is always two bytes long in unsigned short integer format. Most input and output packet types can be interpreted as a pair of ASCII characters. As a semantic aid consider the following single character acronyms:

P = packet

F = fields

Refers to Fields which are settings or data contained in the unit

E = EEPROM

Refers to factory data stored in EEPROM

R = read

Reads default non-volatile fields

G = get

Gets current volatile fields or settings

W = write

Writes default non-volatile fields. These fields are stored in non-volatile memory and determine the unit's behavior on power up. Modifying default fields take effect on the next power up and thereafter.

S = set

Sets current volatile fields or settings. Modifying current fields will take effect immediately by modifying internal RAM and are lost on a power cycle

### 6.3.3 *Payload Length*

The payload length is always a one-byte unsigned character with a range of 0-255. The payload length byte is the length (in bytes) of the *<variable length payload>* portion of the packet only and does not include the CRC.

### 6.3.4 *Payload*

The payload is of variable length based on the packet type.

### 6.3.5 *16-bit CRC-CCITT*

Packets end with a 16-bit CRC-CCITT calculated on the entire packet excluding the 0x5555 header and the CRC field itself. A discussion of the 16-bit CRC-CCITT and sample code for implementing the computation of the CRC is included at the end of this document. This 16-bit CRC standard is maintained by the International Telecommunication Union (ITU). The highlights are:

Width = 16 bits

Polynomial 0x1021

Initial value = 0xFFFF

No XOR performed on the final value.

See Appendix A for sample code that implements the 16-bit CRC algorithm.

### 6.3.6 *Messaging Overview*

Table 81 summarizes the messages available by MTLT305E Series model. Packet types are assigned mostly using the ASCII mnemonics defined above and are indicated in the summary

Table 81 and in the detailed sections for each command. The payload byte-length is often related to other data elements in the packet as defined in the table below. The referenced variables are defined in the detailed sections following. Output messages are sent from the MTLT305E Series inertial system to the user system as a result of a poll request or a continuous packet output setting. Input messages are sent from the user system to the MTLT305E Series inertial system and will result in an associated Reply Message or NAK message. Note that both Input message and its reply message typically have the same **<2-byte packet type (U2)>**.

**Table 81. Message Table**

ASCII Mnemonic	<2-byte packet type (U2)>	<payload byte-length (U1)>	Description	Type
<b>Link Test</b>				
PK	0x504B	0	Ping Command and Response	Input/Reply Message
CH	0x4348	N	Echo Command and Response	Input/Reply Message
<b>Interactive Commands</b>				
GP	0x4750	2	Get Packet Request	Input Message
AR	0x4152	0	Algorithm Reset	Input/Reply Message
NAK	0x1515	2	Error Response	Reply Message
<b>Output Messages: Status &amp; Other, (Polled Only)</b>				
ID	0x4944	5+N	Identification Data	Output Message
VR	0x5652	5	Version Data	Output Message
T0	0x5430	28	Test 0 (Detailed BIT and Status)	Output Message
<b>Output Messages: Measurement Data (Continuous or Polled)</b>				
A2	0x4132	30	Angle 2 Data	Output Message
S1	0x5331		Scaled Sensors Data	Output Message
<b>Advanced Commands</b>				
WF	0x5746	numFields*4+1	Write Fields Request	Input Message
WF	0x5746	numFields*2+1	Write Fields Response	Reply Message
SF	0x5346	numFields*4+1	Set Fields Request	Input Message
SF	0x5346	numFields*2+1	Set Fields Response	Reply Message
RF	0x5246	numFields*2+1	Read Fields Request	Input Message
RF	0x5246	numFields*4+1	Read Fields Response	Reply Message
GF	0x4746	numFields*2+1	Get Fields Request	Input Message
GF	0x4746	numFields*4+1	Get Fields Response	Reply Message

## 7 MTLT305E Standard RS232 Port Commands and Messages

### 7.1 Link Test

#### 7.1.1 Ping Command

Ping ( 'PK' = 0x504B)			
Preamble	Packet Type	Length	Termination
0x5555	0x504B	0x00	<CRC (U2)>

The ping command has no payload. Sending the ping command will cause the unit to send a ping response.

#### 7.1.2 Ping Response

Ping ( 'PK' = 0x504B)			
Preamble	Packet Type	Length	Termination
0x5555	0x504B	0x00	<CRC (U2)>

The unit will send this packet in response to a ping command.

#### 7.1.3 Echo Command

Echo ( 'CH' = 0x4348)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x4348	N	<echo payload>	<CRC (U2)>

The echo command allows testing and verification of the communication link. The unit will respond with an echo response containing the *echo data*. The *echo data* is N bytes long.

#### 7.1.4 Echo Response

Echo Payload Contents					
Byte Offset	Name	Format	Scaling	Units	Description
0	echoData0	U1	-	-	First byte of echo data
1	echoData1	U1	-	-	Second byte of echo data
...	...	U1	-	-	Echo data
N-2	echoData...	U1	-	-	Second to last byte of echo data
N-1	echoData...	U1	-	-	Last byte of echo data

## 7.2 Interactive Commands

Interactive commands are used to interactively request data from the MTLT305E Series, and to calibrate or reset the MTLT305E Series.

### 7.2.1 *Get Packet Request*

Get Packet ( 'GP' = 0x4750)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x4750	0x02	<GP payload>	<CRC (U2)>

This command allows the user to poll for both measurement packets and special purpose output packets including 'T0', 'VR', and 'ID'.

GP Payload Contents			
Byte Offset	Name	Format	Description
0	requestedPacketType	U2	The requested packet type

Refer to the sections below for Packet Definitions sent in response to the 'GP' command

### 7.2.2 *System Reset Command*

Algorithm Reset ( 'SR' = 0x5352)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x5352	0x00	-	<CRC (U2)>

This command resets unit. The unit will respond with a system reset response.

### 7.2.3 *System Reset Response*

Algorithm Reset ( 'SR' = 0x5352)			
Preamble	Packet Type	Length	Termination
0x5555	0x5352	0x00	<CRC (U2)>

The unit will send this packet in response to an algorithm reset command.

### 7.2.4 *Error Response*

Error Response (ASCII NAK, NAK = 0x1515)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x1515	0x02	<NAK payload>	<CRC (U2)>

The unit will send this packet in place of a normal response to a *failedInputPacketType* request if it could not be completed successfully.

NAK Payload Contents			
Byte Offset	Name	Format	Description
0	failedInputPacketType	U2	the failed request

### 7.3 Output Packets (Polled)

The following packet formats are special informational packets which can be requested using the 'GP' command.

#### 7.3.1 Identification Data Packet

Identification Data ( 'ID' = 0x4944)					
Preamble	Packet Type	Length	Payload		Termination
0x5555	0x4944	5+N	<ID payload>		<CRC (U2)>
This packet contains the unit <i>serialNumber</i> and <i>modelString</i> . The model string is terminated with 0x00. The model string contains the programmed <i>versionString</i> (8-bit Ascii values) followed by the firmware part number string delimited by a whitespace. ID Payload Contents					
Byte Offset	Name	Format	Scaling	Units	Description
0	serialNumber	U4	-	-	Unit serial number
4	modelString	SN	-	-	Unit Version String
4+N	0x00	U1	-	-	Zero Delimiter

#### 7.3.2 Version Data Packet

Version Data ( 'VR' = 0x5652)					
Preamble	Packet Type	Length	Payload		Termination
0x5555	0x5652	5	<VR payload>		<CRC (U2)>

This packet contains firmware version information. *majorVersion* changes may introduce serious incompatibilities. *minorVersion* changes may add or modify functionality but maintain backward compatibility with previous minor versions. *patch* level changes reflect bug fixes and internal modifications with little effect on the user. The build *stage* is one of the following: 0=release candidate, 1=development, 2=alpha, 3=beta. The *buildNumber* is incremented with each engineering firmware build. The *buildNumber* and *stage* for released firmware are both zero. The final beta candidate is v.w.x.3.y, which is then changed to v.w.x.0.1 to create the first release candidate. The last release candidate is v.w.x.0.z, which is then changed to v.w.x.0.0 for release.

VR Payload Contents			
Byte Offset	Name	Format	Description
0	majorVersion	U1	Major firmware version

VR Payload Contents			
Byte Offset	Name	Format	Description
1	minorVersion	U1	Minor firmware version
2	patch	U1	Patch level
3	stage	-	Development Stage (0=release candidate, 1=development, 2=alpha, 3=beta)
4	buildNumber	U1	Build number

### 7.3.3 Test (Detailed BIT and Status) Packet

Test ( 'TS' = 0x5430)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x5430	0x06	<TS payload>	<CRC (U2)>

This packet contains detailed BIT and status information. The full BIT Status details are described in Appendix F.

**Table 82. T0 Payload Contents**

TS Payload Contents			
Byte Offset	Name	Format	Description
0	Master BIT status	U2	Master BIT and Status Field
2	Hardware BIT status	U2	Hardware BIT status register
4	Software BIT Status	U4	Software BIT Status register
8 : 27	Reserved	NA	NA

## 7.4 RS232 Output Packets (Polled or Continuous)

### 7.4.1 Angle Data Packet 2 (Default MTLT305E Data)

Angle Data ( 'A2' = 0x4132)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x4132	0x1E	<A2 payload>	<CRC (U2)>

This packet contains angle data and selected sensor data scaled in most cases to a signed 2^16 2's complement number. Data involving angular measurements include the factor pi in the scaling and can be interpreted in either radians or degrees.

Angles: scaled to a range of [-pi,+pi) or [-180 deg to +180 deg].

Angular rates: scaled to range of 3.5\* [-pi,+pi) or [-630 deg/sec to +630 deg/sec)

Accelerometers: scaled to a range of [-10,+10) g

Temperature: scaled to a range of [-100, +100) °C

A2 Payload Contents					
Byte Offset	Name	Format	Scaling	Units	Description
0	rollAngle	I2	2*pi/2^16 [360° /2^16]	Radians [° ]	Roll angle
2	pitchAngle	I2	2*pi/2^16 [360° /2^16]	Radians [° ]	Pitch angle
4	yawAngleTrue	I2	2*pi/2^16 [360° /2^16]	Radians [° ]	Yaw angle (free)
6	xRateCorrected	I2	7*pi/2^16 [1260° /2^16]	rad/s [° /sec]	X angular rate corrected
8	yRateCorrected	I2	7*pi/2^16 [1260° /2^16]	rad/s [° /sec]	Y angular rate corrected
10	zRateCorrected	I2	7*pi/2^16 [1260° /2^16]	rad/s [° /sec]	Z angular rate corrected
12	xAccel	I2	20/2^16	G	X accelerometer
14	yAccel	I2	20/2^16	G	Y accelerometer
16	zAccel	I2	20/2^16	G	Z accelerometer
18	xRateTemp	I2	200/2^16	deg. C	X rate temperature
20	yRateTemp	I2	200/2^16	deg. C	Y rate temperature
22	zRateTemp	I2	200/2^16	deg. C	Z rate temperature
24	timeITOW	U4	1	ms	Not Implemented DMU ITOW (sync to GPS)
28	BITstatus	U2	-	-	Master BIT and Status

#### 7.4.2 Scaled Sensor Data

Scaled sensor data ('S1' = 0x5331)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x5331	0x18	<S1 payload>	<CRC (U2)>

This packet contains scaled sensor data. Data involving angular measurements include the factor pi in the scaling and can be interpreted in either radians or degrees. Note the timer value can be used for synchronization and computation of Delta T. It may appear in NAV-VIEW log files under another column heading.

Angular rates: scaled to range of 3.5\* [-pi,+pi) or [-630 deg/sec to +630 deg/sec)

Accelerometers: scaled to a range of [-10,+10)g

Temperature: scaled to a range of [-100, +100)°C

S1 payload contents					
Byte Offset	Name	Format	Scaling	Units	Description
0	xAccel	I2	20/2^16	g	X accelerometer
2	yAccel	I2	20/2^16	g	Y accelerometer
4	zAccel	I2	20/2^16	g	Z accelerometer
6	xRate	I2	7*pi/2^16 [1260°/2^16]	rad/s [°/sec]	X angular rate
8	yRate	I2	7*pi/2^16 [1260°/2^16]	rad/s [°/sec]	Y angular rate
10	zRate	I2	7*pi/2^16 [1260°/2^16]	rad/s [°/sec]	Z angular rate
12	xRateTemp	I2	200/2^16	deg. C	X rate temperature
14	yRateTemp	I2	200/2^16	deg. C	Y rate temperature
16	zRateTemp	I2	200/2^16	deg. C	Z rate temperature
18	boardTemp	I2	200/2^16	deg. C	CPU board temperature
20	timer	U2	15.259022	uS	Free running fast counter 1s= 65535, captured at sampling
22	BITstatus	U2	-	-	Master BIT and Status

## 8 MTLT305E Advanced RS232 Port Commands

### 8.1 Configuration Fields

Configuration fields determine various behaviors of the unit that can be modified by the user e.g. settings like baud rate, packet output. Advanced commands allow users to programmatically change the MTLT305E Series settings. This section of the manual documents all of the settings and options contained under the Unit Configuration tab within NAV-VIEW. Using these advanced commands, a user's system can change or modify the settings without the need for NAVrate and type, algorithm type, etc. These fields are stored in EEPROM and loaded on power up. These fields can be read from the EEPROM using the 'RF' command. These fields can be written to the EEPROM affecting the default power up behavior using the 'WF' command. The current value of these fields (which may be different from the value stored in the EEPROM) can also be accessed using the 'GF' command. All of these fields can also be modified immediately for the duration of the current power cycle using the 'SF' command. The unit will always power up in the configuration stored in the EEPROM. Configuration fields can only be set or written with valid data from Table below.

**Table 83. Configuration Fields**

<i>configuration fields</i>	<i>field ID</i>	<i>Valid Values</i>	<i>description</i>
Packet rate divider	0x0001	0 (default), 1, 2, 5, 10, 20, 25, 50, 200	quiet (default), 100Hz, 50Hz, 20Hz, 10Hz, 5Hz, 4Hz, 2Hz, 200 Hz
Unit BAUD rate	0x0002	3, 5(default), 6	57600, 115200(default), 230400
Continuous packet type	0x0003	Any output packet type S1, A2(default)	Actual FW default is S1. Units are configured prior to shipment to output A2. If configuration is lost during FW upgrade process, unit will default to S1 packet.
Gyro Filter Setting	0x0006	5 or (8035-18749) 10 or (4018-8034) 20 or (2411-4017) 25 or (1741-2410) 40 or (1205-1740) 50 or (1-1204) 0 = [Unfiltered]	Sets low pass cutoff for rate sensors. Cutoff Frequency choices are 5, 10, 20, 25 (default), 40, and 50 Hz. Setting value 0 disables the filter. Note in range (1-1000), any valid LPF value (2, 10, 20, 25, or 40) will override 50 Hz setting. These values are exceptions in the (1 – 1000) range.
Accelerometer Filter Setting	0x0005	5 or (8035-18749) 10 or (4018-8034) 20 or (2411-4017) 25 or (1741-2410) 40 or (1205-1740) 50 or (1-1204) 0 = [Unfiltered]	Sets low pass cutoff for accelerometers. Cutoff Frequency choices are 5 (default), 10, 20, 25, 40, and 50 Hz. Setting value 0 disables the filter. Setting value 0 disables the filter. Note in range (1-1000), any valid LPF value (2, 10, 20, 25, or 40) will override 50 Hz setting. These values are exceptions in the (1 – 1000) range.

<i>configuration fields</i>	<i>field ID</i>	<i>Valid Values</i>	<i>description</i>
Orientation	0x0007	See below	Determine forward, rightward, and downward facing sides
Ecu Address	0x0032	128 - 247	Default 128
Ecu Baudrate	0x0033	0 - 500K 1 - 250K 2 - 125K 3 - 1000K	Default 500K; Autobaud enabled and unit will sync to any of these rates.
Unit Behavior Switch	0x0064	See Table 45	This field is the same as byte 1 and 2 of Table 45
Synchronization In	0x0068	0 – Disable 1 – Enable PPS in	Default = 0

**Note:** BAUD rate SF and WF has no immediate effect. A new BAUD rate will be applied after IMU restart.

## 8.2 Continuous Packet Type Field

This is the packet type that is being continually output. The supported packet depends on the model number. Please refer to Section 7.4 for a complete list of the available packet types.

## 8.3 Digital Filter Settings

These two fields set the digital low pass filter cutoff frequencies (See Table 84).

**Table 84. Digital Filter Settings**

<b>Field</b>	<b>Filter Setting</b>
0x0006	FilterGyro
0x0005	FilterAccel

## 8.4 Orientation Field

This field defines the rotation from the factory physical to user logical axis sets. This rotation is relative to the default factory orientation for the MTLT305E family model. The default factory axis setting for the MTLT305E orientation field is logical positive axes (X, Y, Z) = physical device axes (+Ux, +Uy, +Uz) which defines the connector pointing to the opposite of +X direction and +Z direction going out the bottom of the unit. See Figure 5.

**Table 85. MTLT305E Orientation Definitions**

<b>Description</b>	<b>Bits</b>	<b>Meaning</b>
X Axis Sign	0	0 = positive, 1 = negative
X Axis	1:2	0 = Ux, 1 = Uy, 2 = Uz, 3 = N/A
Y Axis Sign	3	0 = positive, 1 = negative
Y Axis	4:5	0 = Uy, 1 = Uz, 2 = Ux, 3 = N/A
Z Axis Sign	6	0 = positive, 1 = negative

Description	Bits	Meaning
Z Axis	7:8	0 = Uz, 1 = Ux, 2 = Uy, 3 = N/A
Reserved	9:15	N/A

There are 24 possible orientation configurations (See Table 86). Setting/Writing the field to anything else generates a NAK and has no effect.

**Table 86. MTLT305E Orientation Fields**

Orientation Field Value	X Axis	Y Axis	Z Axis
0x0000 (default)	+Ux	+Uy	+Uz
0x0009	-Ux	-Uy	+Uz
0x0023	-Uy	+Ux	+Uz
0x002A	+Uy	-Ux	+Uz
0x0041	-Ux	+Uy	-Uz
0x0048	+Ux	-Uy	-Uz
0x0062	+Uy	+Ux	-Uz
0x006B	-Uy	-Ux	-Uz
0x0085	-Uz	+Uy	+Ux
0x008C	+Uz	-Uy	+Ux
0x0092	+Uy	+Uz	+Ux
0x009B	-Uy	-Uz	+Ux
0x00C4	+Uz	+Uy	-Ux
0x00CD	-Uz	-Uy	-Ux
0x00D3	-Uy	+Uz	-Ux
0x00DA	+Uy	-Uz	-Ux
0x0111	-Ux	+Uz	+Uy
0x0118	+Ux	-Uz	+Uy
0x0124	+Uz	+Ux	+Uy
0x012D	-Uz	-Ux	+Uy
0x0150	+Ux	+Uz	-Uy
0x0159	-Ux	-Uz	-Uy
0x0165	-Uz	+Ux	-Uy
0x016C	+Uz	-Ux	-Uy

## 8.5 Unit Behavior Switches

This field allows configuration of the unit behavior switches detailed in bytes 1 and 2 of Table 45.

## 8.6 Commands to Program Configuration Using RS232 Port

### 8.6.1 Write Fields Command

Write Fields ( ‘WF’ = 0x5746)				
Preamble	Packet Type	Length	Payload	Termination

0x5555	0x5746	1+numFields*4	<WF payload>	<CRC (U2)>
--------	--------	---------------	--------------	------------

This command allows the user to write default power-up configuration fields to the EEPROM. Writing the default configuration will not take effect until the unit is power cycled. *NumFields* is the number of words to be written. The *field0*, *field1*, *etc.* are the field

IDs that will be written with the *field0Data*, *field1Data*, *etc.*, respectively. The unit will not write to calibration or algorithm fields. If at least one field is successfully written, the unit will respond with a write fields response containing the field IDs of the successfully written fields. If any field is unable to be written, the unit will respond with an error response. Note that both a write fields and an error response may be received as a result of a write fields command. Attempts to write a field with an invalid value is one way to generate an error response. A table of field IDs and valid field values is available in Section 8.1.

WF Payload Contents					
Byte Offset	Name	Format	Scaling	Units	Description
0	numFields	U1	-	-	The number of fields to write
1	field0	U2	-	-	The first field ID to write
3	field0Data	U2	-	-	The first field ID's data to write
5	field1	U2	-	-	The second field ID to write
7	field1Data	U2	-	-	The second field ID's data
...	...	U2	-	-	...
numFields*4 - 3	field...	U2	-	-	The last field ID to write
numFields*4 - 1	field... Data	U2	-	-	The last field ID's data to write

### Write Fields Response

Write Fields ( 'WF' = 0x5746)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x5746	1+numFields*2	<WF payload>	<CRC (U2)>

The unit will send this packet in response to a write fields command if the command has completed without errors.

WF Payload Contents					
Byte Offset	Name	Format	Scaling	Units	Description
0	numFields	U1	-	-	The number of fields written
1	field0	U2	-	-	The first field ID written
3	field1	U2	-	-	The second field ID written
...	...	U2	-	-	More field IDs written
numFields*2 - 1	Field... Data	U2	-	-	The last field ID written

### 8.6.2 Set Fields Command

Set Fields ( 'SF' = 0x5346)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x5346	1+numFields*4	<SF payload>	<CRC (U2)>

This command allows the user to set the unit's current configuration (SF) fields immediately which will then be lost on power down. *NumFields* is the number of words to be set. The *field0*, *field1*, etc. are the field IDs that will be written with the *field0Data*, *field1Data*, etc., respectively. This command can be used to set configuration fields. The unit will not set calibration or algorithm fields. If at least one field is successfully set, the unit will respond with a set fields response containing the field IDs of the successfully set fields. If any field is unable to be set, the unit will respond with an error response. Note that both a set fields and an error response may be received as a result of one set fields command. Attempts to set a field with an invalid value is one way to generate an error response. A table of field IDs and valid field values is available in Section 8.1.

SF Payload Contents					
Byte Offset	Name	Format	Scaling	Units	Description
0	numFields	U1	-	-	The number of fields to set
1	field0	U2	-	-	The first field ID to set
3	field0Data	U2	-	-	The first field ID's data to set
5	field1	U2	-	-	The second field ID to set
7	field1Data	U2	-	-	The second field ID's data to set
...	...	U2	-	-	...
numFields*4 - 3	field... Data	U2	-	-	The last field ID to set
numFields*4 - 1	field... Data	U2	-	-	The last field ID's data to set

### Set Fields Response

Set Fields ( 'SF' = 0x5346)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x5346	1+numFields*2	<SF payload>	<CRC (U2)>

The unit will send this packet in response to a set fields command if the command has completed without errors.

SF Payload Contents			
Byte Offset	Name	Format	Description
0	numFields	U1	The number of fields to set
1	field0	U2	The first field ID to set
3	field1	U2	The second field ID to set
...	...	U2	More field IDs to set
numFields*2 - 1	Field...	U2	The last field ID to set

## 8.7 Read Fields Command

Read Fields ( 'RF' = 0x5246)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x5246	1+numFields*2	<RF payload>	<CRC (U2)>

This command allows the user to read the default power-up configuration fields from the EEPROM. *NumFields* is the number of fields to read. The *field0*, *field1*, etc. are the field IDs to read. RF may be used to read configuration and calibration fields from the EEPROM. If at least one field is successfully read, the unit will respond with a read fields response containing the field IDs and data from the successfully read fields. If any field is unable to be read, the unit will respond with an error response. Note that both read field and error response may be received as a result of a read fields command.

RF Payload Contents			
Byte Offset	Name	Format	Description
0	numFields	U1	The number of fields to read
1	field0	U2	The first field ID to read
3	field1	U2	The second field ID to read
...	...	U2	More field IDs to read
numFields*2 - 1	Field...	U2	The last field ID to read

## 8.8 Read Fields Response

Read Fields ( 'RF' = 0x5246)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x5246	1+numFields*4	<RF payload>	<CRC (U2)>

The unit will send this packet in response to a read field request if the command has completed without errors.

RF Payload Contents					
Byte Offset	Name	Format	Scaling	Units	Description
0	numFields	U1	-	-	The number of fields read

RF Payload Contents					
1	field0	U2	-	-	The first field ID read
3	field0Data	U2	-	-	The first field ID's data read
5	field1	U2	-	-	The second field ID read
7	field1Data	U2	-	-	The second field ID's data read
...	...	U2	-	-	...
numFields*4 - 3	field...	U2	-	-	The last field ID read
numFields*4 - 1	field...Data	U2	-	-	The last field ID's data read

## 8.9 Get Fields Command

Get Fields ( 'GF' = 0x4746)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x4746	1+numFields*2	<GF Data>	<CRC (U2)>

This command allows the user to get the unit's current configuration fields. *NumFields* is the number of fields to get. The *field0*, *field1*, etc. are the field IDs to get. GF may be used to get configuration, calibration, and algorithm fields from RAM. Multiple algorithm fields will not necessarily be from the same algorithm iteration. If at least one field is successfully collected, the unit will respond with a get fields response with data containing the field IDs of the successfully received fields. If any field is unable to be received, the unit will respond with an error response. Note that both a get fields and an error response may be received as the result of a get fields command.

GF Payload Contents					
Byte Offset	Name	Format	Scaling	Units	Description
0	numFields	U1	-	-	The number of fields to get
1	field0	U2	-	-	The first field ID to get
3	field1	U2	-	-	The second field ID to get
...	...	U2	-	-	More field IDs to get
numFields*2 - 1	Field...	U2	-	-	The last field ID to get

## 8.10 Get Fields Response

Get Fields ( 'GF' = 0x4746)				
Preamble	Packet Type	Length	Payload	Termination
0x5555	0x4746	1+numFields*4	<GF Data>	<CRC (U2)>

The unit will send this packet in response to a get fields request if the command has completed without errors.

**GF Payload Contents**

Byte Offset	Name	Format	Scaling	Units	Description
0	numFields	U1	-	-	The number of fields retrieved
1	field0	U2	-	-	The first field ID retrieved
3	field0Data	U2	-	-	The first field ID's data retrieved
5	field1	U2	-	-	The second field ID retrieved
7	field1Data	U2	-	-	The second field ID's data
...	...	U2	-	-	...
numFields*4 -3	field...	U2	-	-	The last field ID retrieved
numFields*4 -1	field...Data	U2	-	-	The last field ID's data retrieved

## 9 Bootloader

### 9.1 Firmware Upgrade

MTLT305E units have a built-in bootloader. Firmware can be upgraded over RS232 interface or over CAN bus interface.

Firmware upgrade over RS232 interface described in section 9.2.

Firmware upgrade over CAN bus interface described in the document “Upgrading FW on Aceinna IMUs over CAN bus”

### 9.2 Firmware Upgrade Using RS232 Interface

A user can initiate firmware upgrade procedure on RS232 interface at any time by sending ‘JI’ or ‘JB’ command (see below command’s format) to application program. This command forces the unit enter Bootloader mode. The unit will communicate at 57.6Kbps baud rate regardless of the original baud rate the unit is configured to. The Bootloader always communicates at 57.6Kbps until the firmware upgrade is complete.

As an additional device recovery option immediately after powering up, every device will enter a recovery window of 200ms prior to application start. During this 200mS window, the user can send ‘JI’ command at 57.6Kbs to the Bootloader in order to force the unit to remain in Bootloader mode.

Once the device enters Bootloader mode via the ‘JI’ command either during recovery window or from normal operation, a user can send a sequence ‘WA’ commands to write a complete application image into the device’s FLASH.

After loading the entire firmware image with successive ‘WA’ commands, a ‘JA’ command is sent to instruct the unit to exit Bootloader mode and begin application execution. At this point, the device will return to its original baud rate.

Optionally, the system can be reboot by cycling power to restart the system.

Use the commands detailed in Sections 9.2.1 for upgrading to a new firmware version.

#### 9.2.1 *Commands used for FW upgrade via RS232 Interface*

Firmware upgrade is performed by a Write APP command through RS232 port, through Windows GUI, NAV-View, or a python program. See

---

Appendix B for information on using Nav-View to update device firmware.

## 10 Customer Service

As an ACEINNA customer you have access to product support services, which include:

- Single-point return service
- Web-based support service
- Same day troubleshooting assistance
- Worldwide ACEINNA representation
- Onsite and factory training available
- Preventative maintenance and repair programs
- Installation assistance available

### 10.1 Contact Directory

Email: [techsupport@aceinna.com](mailto:techsupport@aceinna.com)

<http://www.aceinna.com/support/index.cfm>

### 10.2 Return Procedure

#### 10.2.1 Authorization

Before returning any equipment, please contact ACEINNA to obtain a Returned Material Authorization number (RMA).

Be ready to provide the following information when requesting a RMA:

- Name
- Address
- Telephone, Fax, Email
- Equipment Model Number
- Equipment Serial Number
- Installation Date
- Failure Date
- Fault Description
- Will it connect to NAV-VIEW 3.X?

### ***10.2.2 Identification and Protection***

If the equipment is to be shipped to ACEINNA for service or repair, please attach a tag TO THE EQUIPMENT, as well as the shipping container(s), identifying the owner. Also indicate the service or repair required, the problems encountered, and other information considered valuable to the service facility such as the list of information provided to request the RMA number.

Place the equipment in the original shipping container(s), making sure there is adequate packing around all sides of the equipment. If the original shipping containers were discarded, use heavy boxes with adequate padding and protection.

### ***10.2.3 Sealing the Container***

Seal the shipping container(s) with heavy tape or metal bands strong enough to handle the weight of the equipment and the container.

### ***10.2.4 Marking***

Please write the words, “FRAGILE, DELICATE INSTRUMENT” in several places on the outside of the shipping container(s). In all correspondence, please refer to the equipment by the model number, the serial number, and the RMA number.

## **10.3 Warranty**

The ACEINNA product warranty is one year from date of shipment.

## Appendix A: 16-bit CRC Implementation Sample Code

```
uint16_t CalculateCRC (uint8_t *buf, uint16_t length)
{
    uint16_t crc = 0x1D0F;

    for (int i=0; i < length; i++) {
        crc ^= buf[i] << 8;
        for (int j=0; j<8; j++) {
            if (crc & 0x8000) {
                crc = (crc << 1) ^ 0x1021;
            }
            else {
                crc = crc << 1;
            }
        }
    }
    return ((crc << 8) & 0xFF00) | ((crc >> 8) & 0xFF);
}
```

## Appendix B: Installation and Operation of NAV-VIEW over RS232

NAV-VIEW has been designed to allow users to control all aspects of the MTLT305E Series operation including data recording, configuration and data transfer. For proper use with the MTLT305E family version 3.5.8 or higher of NAV-VIEW is required.

### NAV-VIEW Computer Requirements

The following are minimum requirements for the installation of the NAV-VIEW Software:

- CPU: Pentium-class (1.5GHz minimum)
- RAM Memory: 500MB minimum, 1GB+ recommended
- Hard Drive Free Memory: 20MB
- Operating System: Windows 7, 8 and 10
- Properly installed Microsoft .NET 2.0 or higher

### Install NAV-VIEW

Download Nav-View from ACEINNA Website. To install NAV-VIEW onto your computer:

1. Extract files to local folder.
2. Locate the “NAV-VIEW” folder. Double click on the “setup.exe” file.
3. Follow the setup wizard instructions. You will install NAV-VIEW and .NET 2.0 framework.

### Connections

The MTLT3 Series Inertial Systems products can be purchased with a with a 6-pin Ampseal 16 to 6 Position connector to flying lead cable. In order to connect to NAV-VIEW, the cable can be attached to a standard DB9 connector.

1. Connect the blue wire (Ampseal pin 4 - RS232-RX) to the host system RS232 TX pin.
2. Connect the white wire (Ampseal pin 5 - RS232-TX) to the host system RS232 RX pin.
3. Connect the black wire (Ampseal pin 3 - GND) to host system and power supply ground.
4. Connect the red wire (Ampseal pin 6 - Power) to power supply positive, 9 - 32 VDC.

### ◀ NOTE

Allow at least 1 seconds after power up for the MTLT3 Series product for initialization. The MTLT3 Series needs to be held motionless during this period.

### ⚠ WARNING

**Do not reverse the power leads!** Reversing the power leads to the MTLT305E Series can damage the unit; although there is reverse power protection, ACEINNA is not responsible for resulting damage to the unit should the reverse voltage protection electronics fail.

## Setting up NAV-VIEW

With the MTLT305E Series product powered up and connected to your PC serial port, open the NAV-VIEW software application.


1. NAV-VIEW should automatically detect the MTLT305E Series product and display the serial number and firmware version if it is connected.
2. If NAV-VIEW does not connect, check that you have the correct COM port selected. You will find this under the “Setup” menu. Select the appropriate COM port and allow the unit to automatically match the baud rate by leaving the “Auto: match baud rate” selection marked.
3. If the status indicator at the bottom is green and states, **Unit Connected**, you’re ready to go. If the status indicator doesn’t say connected and is red, check the connections between the MTLT305E Series product and the computer, check the power supply, and verify that the COM port is not occupied by another device.
4. Under the “View” menu you have several choices of data presentation. Graph display is the default setting and will provide a real time graph of all the MTLT305E Series data. The remaining choices will be discussed in the following pages.

## Data Recording

NAV-VIEW allows the user to log data to a text file (.txt) using the simple interface at the top of the screen. Customers can now tailor the type of data, rate of logging and can even establish predetermined recording lengths.

To begin logging data follow the steps below (See Figure 6):

1. Locate the  icon at the top of the page or select “Log to File” from the “File” drop down menu.
2. The following menu will appear.

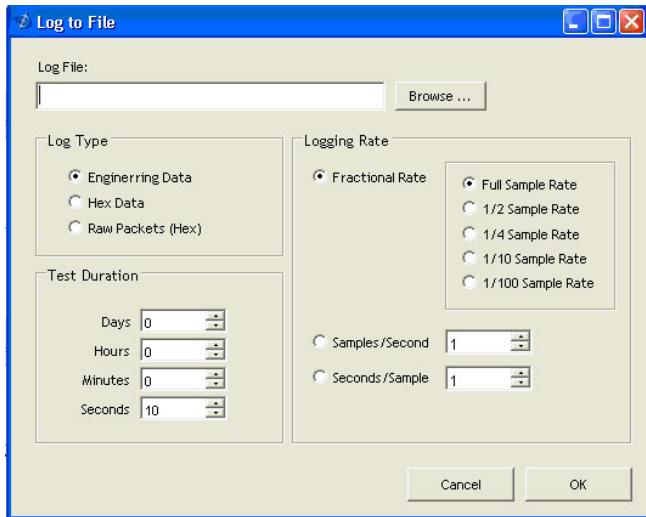


**Figure 6 Log to File Dialog Screen**

3. Select the “Browse” box to enter the file name and location that you wish to save your data to.
4. Select the type of data you wish to record. “Engineering Data” records the converted values provided from the system in engineering units, “Hex Data” provides the raw hex values separated into columns displaying the value, and the “Raw Packets” will simply record the raw hex strings as they are sent from the unit.
5. Users can also select a predetermined “Test Duration” from the menu. Using the arrows, simply select the duration of your data recording.
6. Logging Rate can also be adjusted using the features on the right side of the menu.
7. Once you have completed the customization of your data recording, you will be returned to the main screen where you can start the recording process using the  button at the top of the page or select “Start Logging” from the “File” menu. Stopping the data recording can be accomplished using the  button and the recording can also be paused using the  button.

### Data Playback

In addition to data recording, NAV-VIEW allows the user to replay saved data that has been stored in a log file.

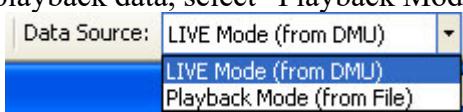1. To playback data, select “Playback Mode” from the “Data Source” drop down menu at the top.
 
2. Selecting Playback mode will open a text prompt which will allow users to specify the location of the file they wish to play back. All three file formats are supported (Engineering, Hex, and Raw) for playback. In addition, each time recording is stopped/started a new


section is created. These sections can be individually played back by using the drop down menu and associated VCR controls.

3. Once the file is selected, users can utilize the VCR style controls at the top of the page to start, stop, and pause the playback of the data.
4. NAV-VIEW also provides users with the ability to alter the start time for data playback.

Using the  slide bar at the top of the page users can adjust the starting time.

### Raw Data Console

NAV-VIEW offers some unique debugging tools that may assist programmers in the development process. One such tool is the Raw Data Console. From the “View” drop down menu, simply select the “Raw Data Console”. This console provides users with a simple display of the packets that have been transmitted to the unit (Tx) and the messages received (Rx). An example is provided in Figure 7.

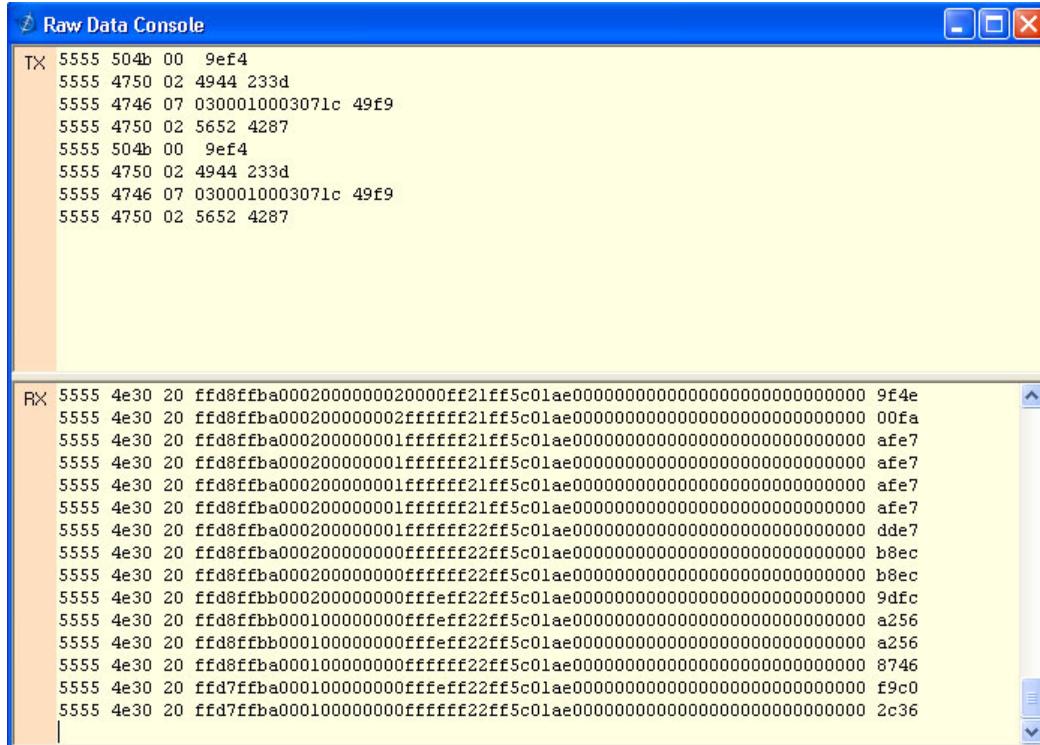

The screenshot shows a Windows-style application window titled "Raw Data Console". The window has a blue title bar and standard window controls (minimize, maximize, close). The main area is divided into two sections: "TX" (Transmit) and "RX" (Receive). The TX section contains the following log entries:

```

TX 5555 504b 00 9ef4
5555 4750 02 4944 233d
5555 4746 07 0300010003071c 49f9
5555 4750 02 5652 4287
5555 504b 00 9ef4
5555 4750 02 4944 233d
5555 4746 07 0300010003071c 49f9
5555 4750 02 5652 4287

```

The RX section contains the following log entries:

```

RX 5555 4e30 20 ffd8ffba0002000000020000ff21ff5c01ae00000000000000000000000000000000 9f4e
5555 4e30 20 ffd8ffba000200000002fffff21ff5c01ae00000000000000000000000000000000 00fa
5555 4e30 20 ffd8ffba000200000001fffff21ff5c01ae00000000000000000000000000000000 afe7
5555 4e30 20 ffd8ffba000200000001fffff22ff5c01ae00000000000000000000000000000000 dde7
5555 4e30 20 ffd8ffba000200000000fffff22ff5c01ae00000000000000000000000000000000 b8ec
5555 4e30 20 ffd8ffba000200000000fffff22ff5c01ae00000000000000000000000000000000 b8ec
5555 4e30 20 ffd8ffbb000200000000fffff22ff5c01ae00000000000000000000000000000000 9dfc
5555 4e30 20 ffd8ffbb000100000000fffff22ff5c01ae00000000000000000000000000000000 a256
5555 4e30 20 ffd8ffbb000100000000fffff22ff5c01ae00000000000000000000000000000000 a256
5555 4e30 20 ffd8ffba000100000000fffff22ff5c01ae00000000000000000000000000000000 8746
5555 4e30 20 ffd7ffba000100000000fffff22ff5c01ae00000000000000000000000000000000 f9c0
5555 4e30 20 ffd7ffba000100000000fffff22ff5c01ae00000000000000000000000000000000 2c36


```

**Figure 7 Raw Data Console**

### Packet Statistics View

Packet statistics can be obtained from the “View” menu by selecting the “Packet Statistics” option (See Figure 8). This view simply provides the user with a short list of vital statistics (including Packet Rate, CRC Failures, and overall Elapsed Time) that are calculated over a one second window. This tool should be used to gather information regarding the overall health of the user

configuration. Incorrectly configured communication settings can result in a large number of CRC Failures and poor data transfer.

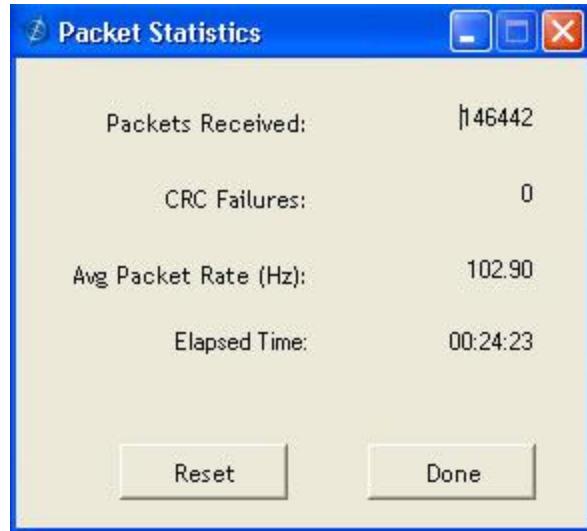


**Figure 8** Packet Statistics

### CAN configuration

MTLT's address is configurable through NAV-VIEW, or automatically assigned by address claiming protocol if the existing address is conflict with another ECU on the same network. See below Figure 9.


Click Menu Configuration, then select Unit Configuration and click the tab, CAN Parameter. Choose the address' value, then click the button Set Values.

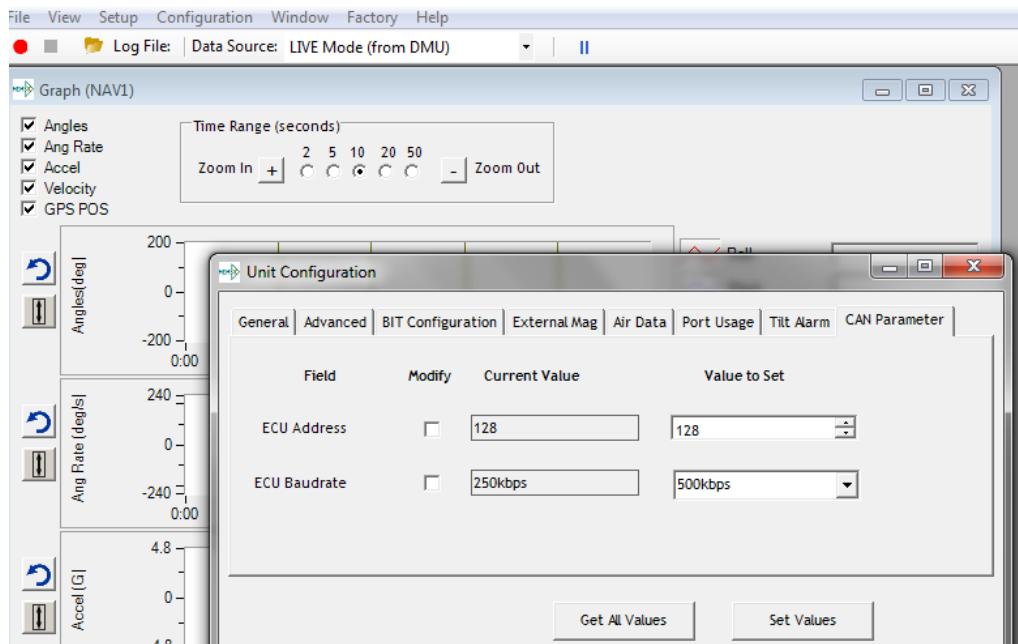

**Figure 9 Unit Configuration**


## Firmware Upgrade

Step 1, select Firmware upgrade from configuration menu.

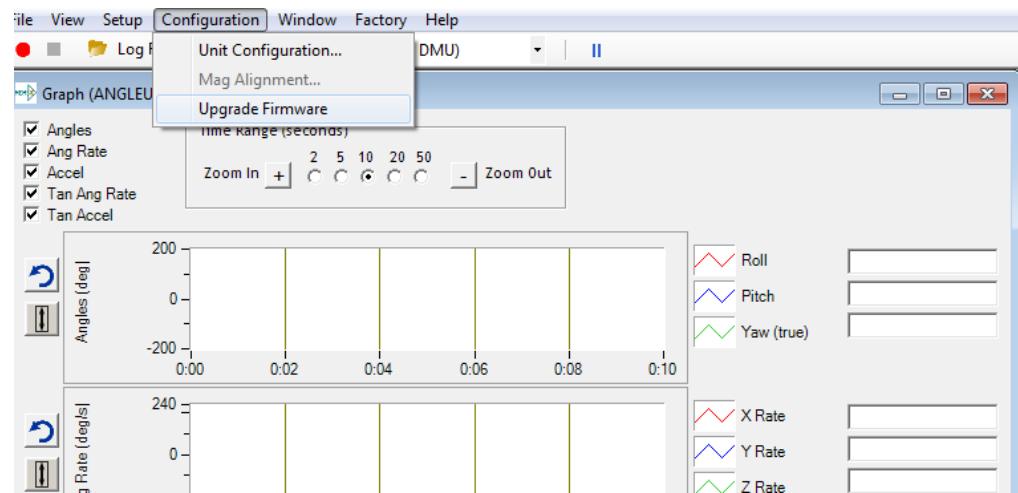


**Figure 10 Firmware Upgrade 1**

Step 2, On pop-up window, select a new version binary file by clicking SELECT button, then click Upgrade button.

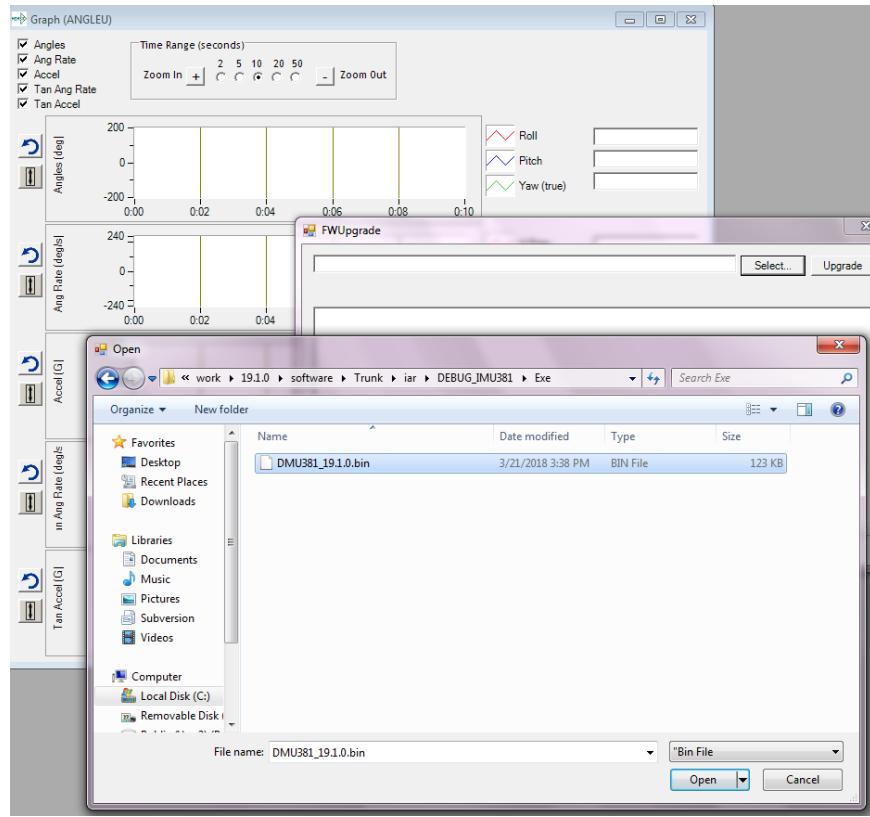



**Figure 11 Firmware Upgrade 2**

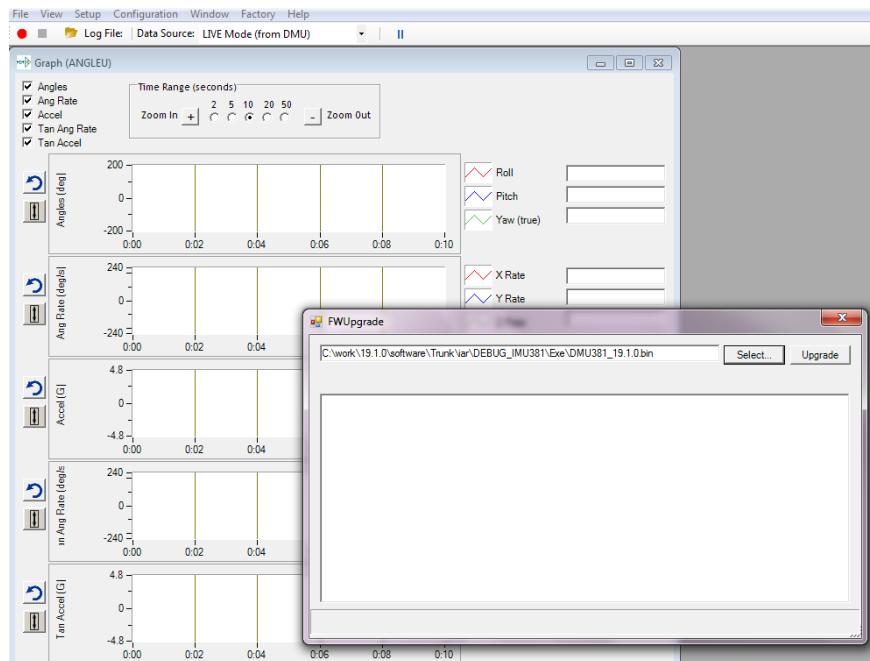

**Figure 12 Firmware Upgrade 3**

Step 3, wait for the process ongoing until a successful or failure message pops up.

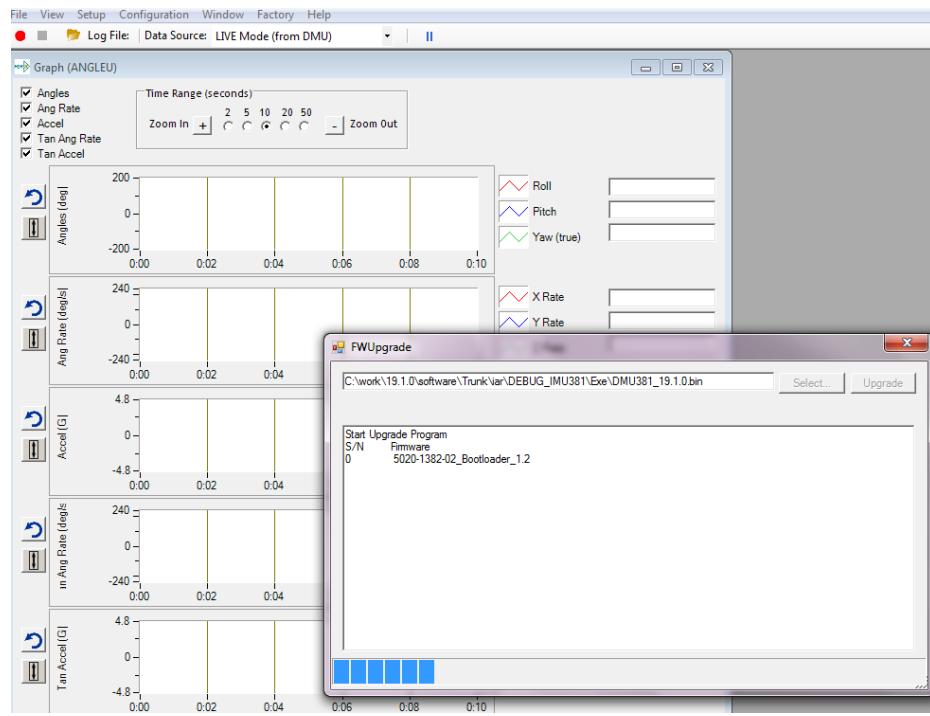**Figure 12 Firmware Upgrade 4**

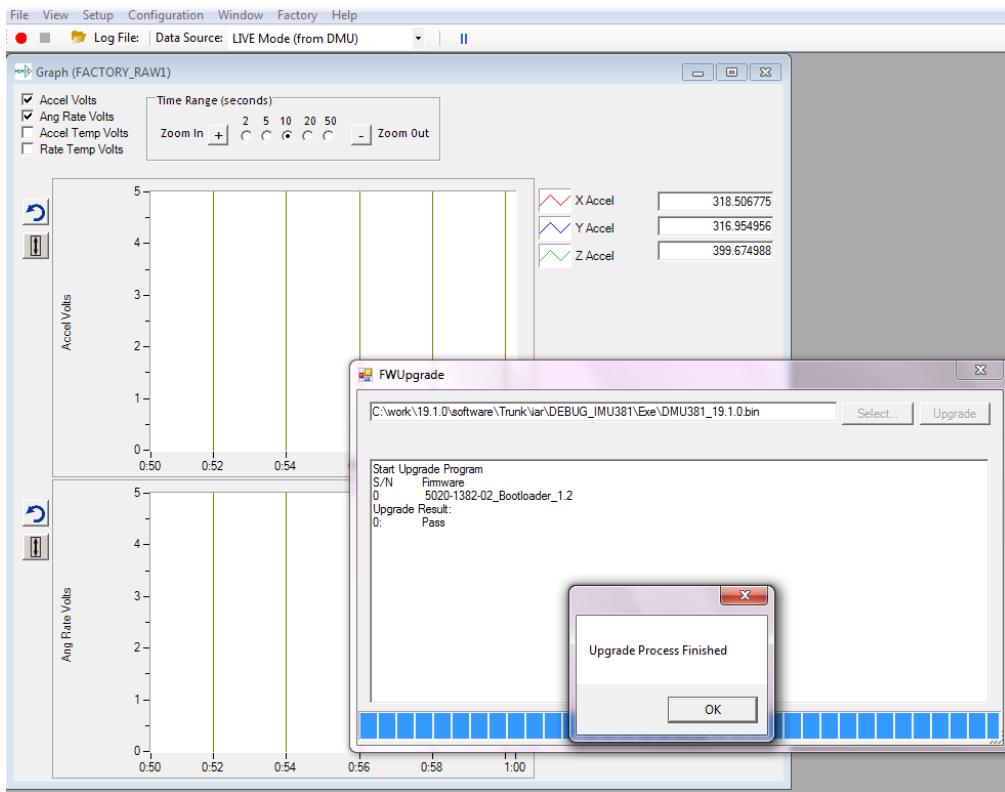

**Figure 13 Firmware Upgrade 5**

## Appendix C: Response to ECU ID request example

- Upon startup unit internally generates an ECU ID in ASCII form and stores in temporary buffer. For example:

MTLT305E3316-02\*2043604055\* (28 bytes)

Where: MTLT305E – Model name,

3316-02 – Part number

2043604055 – Unit Serial number

- User send to IMU Get PGN 64965 message requesting feedback for PGN 64965 with the following payload in the Get PGN request.

Byte0	Byte1	Byte2
0xC5	0xFD	0x00

- IMU responds with Transport Control Protocol (TP) RTS message (PGN 60416) with the following payload.

Byte	Value	Comment
0	0x10	RTS
1:2	0x001A	Total Response Size in Bytes
3	4	Total Number Of TP data packets to transfer ECU ID
4	4	Maximum Number Of TP data packets to be transferred
5	0xC5	PGN (LSB)
6	0xFD	PGN (MID)
7	0x00	PGN (MSB)

- User responds to IMU with TP CTS message (PGN 60416) with the following payload:

Byte	Value	Comment
0	0x11	CTS
1	4	Total Number Of TP data packets to receive
2	1	Number of first packet
4:5		Reserved
5	0xC5	PGN (LSB)
6	0xFD	PGN (MID)
7	0x00	PGN (MSB)

---

5. Unit responds with back with the set of 4 TP data message:

1CEBAB80 01 4D 54 4C 54 33 30 35 ... MTLT305  
 1CEBAB80 02 45 2C 33 33 31 36 2D ... E,3316-  
 1CEBAB80 03 30 32 2A 32 30 34 33 ... 02\*2043  
 1CEBAB80 04 36 30 34 30 35 35 2A ... 604055\*

First byte in every packet is TP data packet number.

6. User responds to IMU with TP ACK message (PGN 60416) with next payload:

Byte	Value	Comment
0	0x13	ACK
1:2	0x001A	Total received message size (in Bytes)
3	4	Total Number Of TP data packets to received
4	4	Reserved
5	0xC5	PGN (LSB)
6	0xFD	PGN (MID)
7	0x00	PGN (MSB)

## Appendix D: Response to SW Version request

- Upon startup unit internally generates a Software ID in ASCII form and stores in temporary buffer. For example:

BB0001,1.00.14#AP0101,21.21#(28 bytes)

Where: BB0001,01.00.14 – Bootloader Version 01.00.14,  
AP0101,21.21 – Application Version 21.21

- User send to IMU Get PGN 65242 message requesting feedback for PGN 65242 with the following payload in the Get PGN request.

Byte0	Byte1	Byte2
0xDA	0xFE	0x00

- IMU responds with TP RTS message (PGN 60416) with next payload

Byte	Value	Comment
0	0x10	RTS
1:2	0x0022	Total Response Size in Bytes
3	0x05	Total number of TP data packets to transfer ECU ID
4	0x05	Maximum Number Of TP data packets to be transferred
5	0xDA	PGN (LSB)
6	0xFE	PGN (MID)
7	0x00	PGN (MSB)

- User responds to IMU with TP CTS message (PGN 60416) with next payload:

Byte	Value	Comment
0	0x11	CTS
1	5	Total number of TP data packets to ready to receive
2	1	Number of first packet
4:5		Reserved
5	0xDA	PGN (LSB)
6	0xFE	PGN (MID)
7	0x00	PGN (MSB)

- Unit responds with back with the set of TP data message. Actual number of TP messages depends upon the boot loader and FW version. Here is an example:

1CEBAA80 Rx 8 01 42 42 30 30 30 31 2C ... .BB0001,  
 1CEBAA80 Rx 8 02 31 2E 30 2E 31 34 23 ... .1.0.14#  
 1CEBAA80 Rx 8 03 41 50 30 31 30 31 2C ... .AP0101,  
 1CEBAA80 Rx 8 04 32 31 2E 32 31 23 2A ... .21.21#\*.  
 First byte in every packet is TP data packet number.

6. User responds to IMU with TP ACK message (PGN 60416) with next payload:

Byte	Value	Comment
0	0x13	ACK
1:2	0x0022	Total received message size (in Bytes)
3	5	Total Number Of TP data packets to received
4	5	Reserved
5	0xDA	PGN (LSB)
6	0xFE	PGN (MID)
7	0x00	PGN (MSB)

## Appendix E: FOM and BIT Examples

Below are some scenarios that can help guide users with using FOM and Built In Test (BIT).

### Scenarios

- 1) Algorithm Fails to complete initialization
  - Master BIT [2] is set to 1 indicating there is a SW BIT error
  - SW BIT [1] is set to 1 indicating the algorithm initialization took longer than 5 second
  - SW BIT [2] is set to 1 indicating the algorithm is still in the initialization state and unit is not ready
  - SSI2 FOM is set to 10 indicating there is an error.
  - ACTION: Stop using device for machine input. Reset or Power cycle device to try and clear condition. If condition persists replace device.

## Appendix F: Advanced RS232 Port BIT

### Built In Test (BIT) and Status Words

#### Master BIT Status Word

The Master BIT Status word is the global indication of health and status of the MTLT305E Series product. It contains the same information and has the same structure as Master BIT Status word which can be requested over CAN bus. Please refer to p. 5.1.4.7. Master status word is appended to every periodic data packet (A1, S1)

#### Software BIT Status Word

The Software BIT Status word contains the same information and has the same structure as Software BIT Status word which can be requested over CAN bus. Software status word can be requested via serial port as a part of T0 message. Please refer to p. 5.1.4.8.

#### Hardware BIT Status Word

The Hardware BIT Status word contains the same information and has the same structure as Hardware BIT Status word which can be requested over CAN bus. Hardware status word can be requested via serial port as a part of T0 message. Please refer to p. 5.1.4.9.

## Appendix G: RS232 Sample Packet Decoding

5555 4132 1e 0006ffe4ed91ffff9ffffdffedfff7ffff9f3312c642ce12d8500010b1c0300 6945

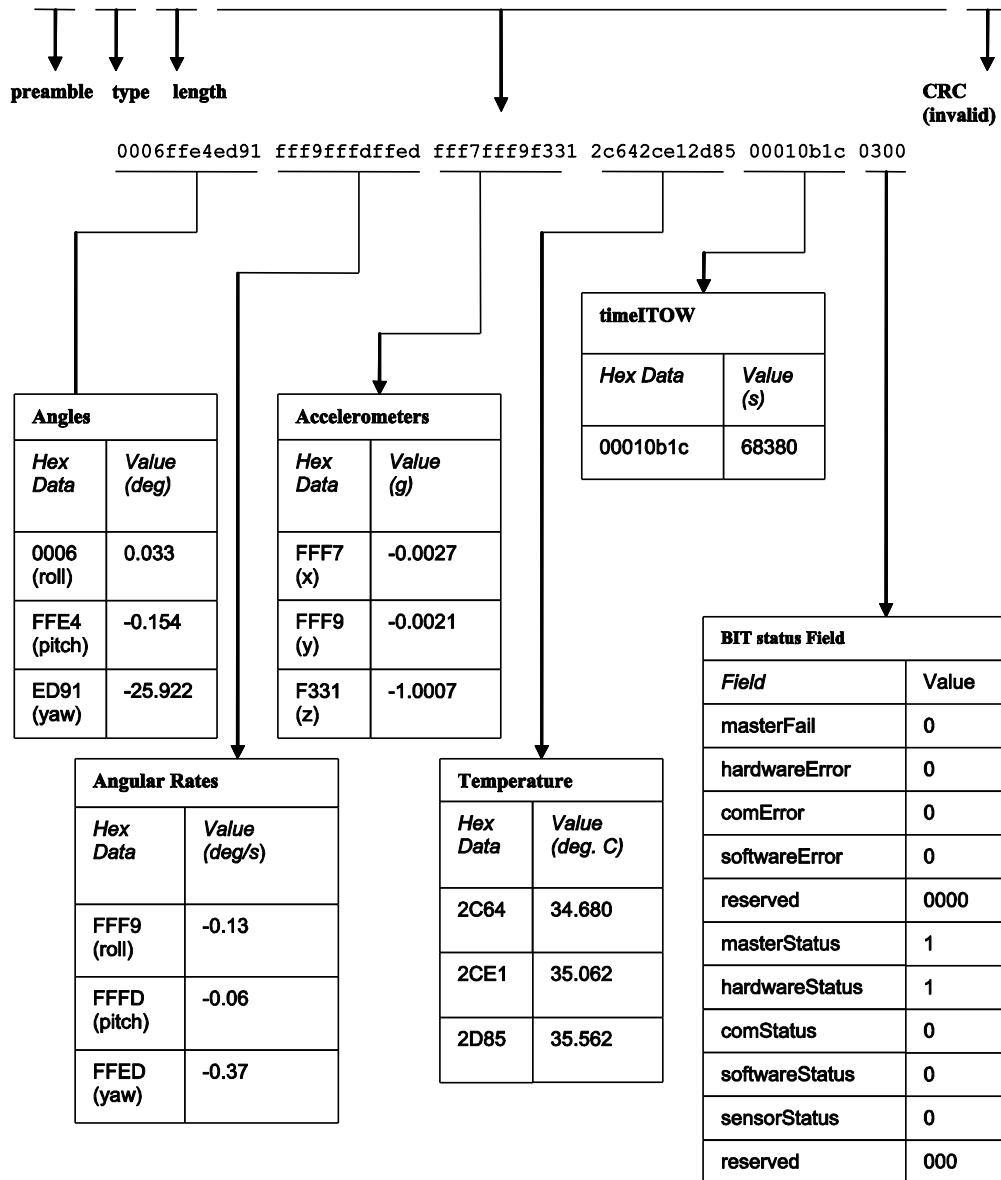


Figure 14 Example payload from Angle Data Packet 2 (A2)

